

DIN EN 10083-3

DIN

ICS 77.140.10

Supersedes
DIN EN 10083-3:2006-10

**Steels for quenching and tempering –
Part 3: Technical delivery conditions for alloy steels
English version of DIN EN 10083-3:2007-01**

Vergütungsstähle –
Teil 3: Technische Lieferbedingungen für legierte Stähle
Englische Fassung DIN EN 10083-3:2007-01

Document comprises 58 pages

National foreword

This standard has been prepared by ECISS/TC 23 “Steels for heat treatment, alloy steels and free-cutting steels – Qualities and dimensions” (Secretariat: Germany).

The responsible German body involved in its preparation was the *Normenausschuss Eisen und Stahl* (Steel and Iron Standards Committee), Technical Committee 05/1.

Amendments

This standard differs from DIN EN 10083-1:1996-10, DIN EN 10083-3:1996-02 and DIN 17212:1972-08 as follows:

- a) This series of standards (DIN EN 10083-1 to -3) has been thematically restructured. Previously, the three parts were divided up as follows :
- Part 1: Technical delivery conditions for special steels
 - Part 2: Technical delivery conditions for unalloyed quality steels
 - Part 3: Technical delivery conditions for boron steels

The three parts are now divided up in a more appropriate manner:

- Part 1: General technical delivery conditions
- Part 2: Technical delivery conditions for non-alloy steels
- Part 3: Technical delivery conditions for alloy steels

This restructuring was achieved by including the following general information – which was previously given in all three parts – in the first part only: figures showing the location of test pieces and samples; and the Annexes “Ruling sections for mechanical properties”, “Other relevant standards”, “Dimensional standards applicable to products complying with this European Standard”, and “Non-metallic inclusion content”. However, the diagrams and information in annexes specific to unalloyed or to alloyed quality steels have been left in the relevant part, namely Part 2 or Part 3, respectively.

- b) Flame and induction hardening steels are now included in the scope of this standards series.
- c) Grades 38CrS2, 46CrS2, and 36CrNiMo4 have been deleted, while grades 35NiCr6, 39NiCrMo3 and 30NiCrMo16-6 have been added.
- d) Manufacturers can now verify hardenability by calculation where this is possible.
- e) The standard has been editorially revised.

The following corrections have been made to DIN EN 10083-3:2006-10:

- a) The national foreword has been corrected.

Previous editions

- DIN 1661: 1924-09, 1929-06
- DIN 1662: 1928-07, 1930-06
- DIN 1662 Supplement 5, Supplement 6, Supplement 8 to Supplement 11:1932-05
- DIN 1663: 1936-05, 1939x-12
- DIN 1663 Supplement 5, Supplement 7 to Supplement 9:1937x-02
- DIN 1665: 1941-05
- DIN 1667: 1943-11
- DIN 17200 Supplement: 1952-05

DIN 17200: 1951-12, 1969-12, 1984-11, 1987-03

DIN 17212: 1972-08

DIN EN 10083-1: 1991-10, 1996-10

DIN EN 10083-3: 1996-02, 2006-10

— This page is intentionally blank —

English Version

Steels for quenching and tempering - Part 3: Technical delivery conditions for alloy steels

Aciers pour trempe et revenu - Partie 3: Conditions techniques de livraison des aciers alliés

Vergütungsstähle - Teil 3: Technische Lieferbedingungen für legierte Stähle

This European Standard was approved by CEN on 30 June 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....3

1 Scope4

2 Normative references4

3 Terms and definitions5

4 Classification and designation.....5

4.1 Classification.....5

4.2 Designation5

5 Information to be supplied by the purchaser5

5.1 Mandatory information5

5.2 Options6

6 Manufacturing process6

6.1 General.....6

6.2 Deoxidation7

6.3 Heat treatment and surface condition at delivery7

6.4 Cast separation7

7 Requirements7

7.1 Chemical composition, hardenability and mechanical properties7

7.2 Machinability8

7.3 Shearability of semi-finished products and bars8

7.4 Structure8

7.5 Internal soundness8

7.6 Surface quality8

7.7 Dimensions, tolerances on dimensions and shape9

8 Inspection9

8.1 Testing procedures and types of documents9

8.2 Frequency of testing9

8.3 Tests to be carried out for specific inspection10

9 Preparation of samples and test pieces10

9.1 Selection and preparation of samples for chemical analysis10

9.2 Location and orientation of samples and test pieces for mechanical tests10

9.3 Location and preparation of samples for hardness and hardenability tests10

9.4 Identification of samples and test pieces10

10 Test methods.....10

10.1 Chemical analysis.....10

10.2 Mechanical tests10

10.3 Hardness and hardenability tests11

10.4 Retests11

11 Marking, labelling, packaging.....11

Annex A (normative) Options50

Annex B (informative) Comparison of steel grades specified in this European Standard and ISO 683-1:1987 and other steel grades previously standardized nationally.....52

Annex C (informative) Reference values for the maximum diameter at a certain core hardness of steels with boron53

Bibliography54

Foreword

This document (EN 10083-3:2006) has been prepared by Technical Committee ECISS/TC 23 “Steels for heat treatment, alloy steels and free-cutting steels - Qualities and dimensions”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2007, and conflicting national standards shall be withdrawn at the latest by February 2007.

This document supersedes EN 10083-3:1995.

Together with Part 1 and Part 2 of this standard this part 3 is a revision of the following European Standards:

EN 10083-1:1991 +A1:1996, *Quenched and tempered steels – Part 1: Technical delivery conditions for special steels*

EN 10083-2:1991 +A1:1996, *Quenched and tempered steels – Part 2: Technical delivery conditions for unalloyed quality steels*

EN 10083-3:1995, *Quenched and tempered steels – Part 3: Technical delivery conditions for boron steels*

and of

EURONORM 86-70, *Flame and induction hardening steels – Quality specifications*

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This part of EN 10083, in addition to Part 1, specifies the technical delivery requirements for:

- semi-finished products, hot formed, e.g. blooms, billets, slabs (see NOTES 2 and 3 in EN 10083-1:2006, Clause 1),
- bars (see NOTE 2 in EN 10083-1:2006, Clause 1),
- rod,
- wide flats,
- hot-rolled strip and sheet/plate,
- forgings (see NOTE 2 in EN 10083-1:2006, Clause 1),

manufactured from the direct hardening alloy steels for quenching and tempering and the alloy flame and induction hardening steels and supplied in one of the heat treatment conditions given for the different types of products in Table 1, lines 2 to 6, and in one of the surface conditions given in Table 2.

The steels are generally intended for the fabrication of quenched and tempered, flame or induction hardened machine parts.

The requirements for mechanical properties given in this document are restricted to the sizes given in Table 8.

NOTE This document does not apply for bright steel products. For bright steel products EN 10277-1 and EN 10277-5 apply.

In special cases, variations in these technical delivery requirements or additions to them may be agreed at the time of enquiry and order (see Annex A).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 10002-1, *Metallic materials – Tensile testing – Part 1: Method of test at ambient temperature*

EN 10020, *Definition and classification of grades of steel*

EN 10027-1, *Designation systems for steels – Part 1: Steel names*

EN 10027-2, *Designation systems for steels – Part 2: Numerical system*

EN 10045-1, *Metallic materials – Charpy impact test – Part 1: Test method*

EN 10083-1:2006, *Steels for quenching and tempering – Part 1: General technical delivery conditions*

EN 10160, *Ultrasonic testing of steel flat product of thickness equal or greater than 6 mm (reflection method)*

EN 10163-2, *Delivery requirements for surface condition of hot-rolled steel plates, wide flats and sections – Part 2: Plate and wide flats*

EN 10204, *Metallic products – Types of inspection documents*

EN 10221, *Surface quality classes for hot-rolled bars and rods – Technical delivery conditions*

CR 10261, *ECISS Information Circular 11 – Iron and steel – Review of available methods of chemical analysis*

EN 10308, *Non destructive testing – Ultrasonic testing of steel bars*

EN ISO 377, *Steel and steel products – Location and preparation of samples and test pieces for mechanical testing (ISO 377:1997)*

EN ISO 642, *Steel – Hardenability test by end quenching (Jominy test) (ISO 642:1999)*

EN ISO 643, *Steels – Micrographic determination of the apparent grain size (ISO 643:2003)*

EN ISO 3887, *Steels – Determination of depth of decarburization (ISO 3887:2003)*

EN ISO 6506-1, *Metallic materials – Brinell hardness test – Part 1: Test method (ISO 6506-1:2005)*

EN ISO 6508-1:2005, *Metallic materials – Rockwell hardness test – Part 1: Test method (scales A, B, C, D, E, F, G, H, K, N, T) (ISO 6508-1:2005)*

EN ISO 14284, *Steel and iron – Sampling and preparation of samples for the determination of chemical composition (ISO 14284:1996)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 10083-1:2006 apply.

4 Classification and designation

4.1 Classification

All steel grades are classified according to EN 10020 as alloy special steels.

4.2 Designation

4.2.1 Steel names

For the steel grades covered by this document, the steel names as given in the relevant tables are allocated in accordance with EN 10027-1.

4.2.2 Steel numbers

For the steel grades covered by this document, the steel numbers as given in the relevant tables are allocated in accordance with EN 10027-2.

5 Information to be supplied by the purchaser

5.1 Mandatory information

See EN 10083-1:2006, 5.1.

5.2 Options

A number of options are specified in this document and listed below. If the purchaser does not indicate his wish to implement any of these options, the supplier shall act in accordance with the basic specification.

- a) any particular heat treatment condition (see 6.3.2);
- b) any particular surface condition (see 6.3.3);
- c) any verification of the product analysis (see 7.1.2.2 and A.5);
- d) any requirement to the hardenability (+H, +HH, +HL) (see 7.1.3) and if agreed the information about calculation of the hardenability (see 10.3.2);
- e) any verification of mechanical properties of reference test pieces in the quenched and tempered (+QT) condition (see A.1);
- f) any verification of fine grain size (see 7.4 and A.2);
- g) any requirements for the verification of non-metallic inclusion content (see 7.4 and A.3);
- h) any requirement for internal soundness (see 7.5 and A.4);
- i) any requirement relating to surface quality (see 7.6.3);
- j) any requirement regarding the permissible depth of decarburization (see 7.6.4);
- k) suitability of bars and rod for bright drawing (see 7.6.5);
- l) any requirement relating to removal of surface defects (see 7.6.6);
- m) inspection of surface condition and dimensions shall be carried out by the purchaser at the manufacturer's works (see 8.1.4);
- n) any requirement concerning special marking of the products (see 11 and A.6).

EXAMPLE

20 round bars with the nominal diameter 20 mm and the nominal length of 8000 mm according to EN 10060 made of steel grade 25CrMo4 (1.7218) according to EN 10083-3 in the heat treatment condition +A, inspection certificate 3.1 as specified in EN 10204.

20 round bars EN 10060 - 20x8000
EN 10083-3 – 25CrMo4+A
EN 10204 - 3.1

or

20 round bars EN 10060 - 20x8000
EN 10083-3 – 1.7218+A
EN 10204 - 3.1

6 Manufacturing process

6.1 General

The manufacturing process of steel and of the products is left to the discretion of the manufacturer with the restrictions given by the requirements in 6.2 to 6.4.

6.2 Deoxidation

All steels shall be killed.

6.3 Heat treatment and surface condition at delivery

6.3.1 Untreated condition

Unless otherwise agreed at the time of enquiry and order, the products shall be delivered in the untreated, i.e. hot worked, condition.

NOTE Depending on the product shape and dimensions, not all steel grades can be delivered in the hot worked untreated condition (e.g. steel grade 30CrNiMo8).

6.3.2 Particular heat treatment condition

If so agreed at the time of enquiry and order, the products shall be delivered in one of the heat-treatment conditions given in Table 1, lines 3 to 6.

6.3.3 Particular surface condition

If so agreed at the time of enquiry and order, the products shall be delivered with one of the particular surface conditions given in Table 2, lines 3 to 7.

6.4 Cast separation

The products shall be delivered separated by cast.

7 Requirements

7.1 Chemical composition, hardenability and mechanical properties

7.1.1 General

Table 1 shows the combinations of usual heat-treatment conditions at delivery, product forms and requirements as specified in Tables 3 to 8.

Except where the steels are ordered in the quenched and tempered condition, the steels may be supplied with or without hardenability requirements (see Table 1, columns 8 and 9).

7.1.2 Chemical composition

7.1.2.1 The chemical composition determined by cast analysis shall comply with the values in Table 3.

7.1.2.2 Permissible deviations between the limiting values for cast analysis and the values for product analysis are given in Table 4.

The product analysis shall be carried out when specified at the time of the order (see A.5).

7.1.3 Hardenability

Where the steel is ordered by using the symbols for normal (+H) or restricted (+HL, +HH) hardenability requirements, the hardenability values given in Table 5 or Table 6 shall apply.

7.1.4 Mechanical properties

EN 10083-3:2006 (E)

Where the steel is ordered without hardenability requirements, the requirements for mechanical properties specified in Table 8 for the quenched and tempered condition apply.

In this case the hardenability values given in Table 5 are for guidance purposes only.

The mechanical property values given in Table 8 apply to test pieces in the quenched and tempered condition which have been taken and prepared in accordance with EN 10083-1:2006, Figure 1 or Figures 2 and 3 (see also footnote a in Table 1).

7.1.5 Surface hardness

For the hardness of surface hardened zones of steels intended for flame and induction hardening the specifications in Table 9 apply.

7.2 Machinability

All steels delivered in the soft annealed (+A) condition are machinable. Where improved machinability is required, the grades with a specified sulphur range should be ordered and/or with a specific treatment to improve machinability (e.g. Ca treatment), see also Table 3, footnote c.

7.3 Shearability of semi-finished products and bars

7.3.1 Under suitable conditions (avoiding local stress peaks, pre-heating, application of blades with a profile adapted to that of the product, etc.) all steels are shearable in the soft-annealed (+A) condition (see, however, footnote f to Table 7).

7.3.2 Steel grades without boron up to steel grade 42CrMoS4 and the boron-alloy steel grades 33MnCrB5-2 and 39MnCrB6-2 (see Table 7) and the corresponding grades with requirements on hardenability (see Tables 5 and 6) are shearable under suitable conditions, if they are supplied in the "treated to improve shearability (+S)" condition with the hardness requirements as specified in Table 7.

7.3.3 Under suitable conditions steel grades 20MnB5, 30MnB5, 38MnB5 and 27MnCrB5-2 and the corresponding grades with requirements on hardenability (see Table 5) are shearable in the untreated condition.

7.4 Structure

7.4.1 All steels shall have a fine grain structure with an austenite grain size of 5 or finer, when tested in accordance with EN ISO 643. For verification see A.2.

7.4.2 The steels shall have a degree of cleanness corresponding to the special steel quality (see A.3 and EN 10083-1:2006, Annex E).

7.5 Internal soundness

Where appropriate, requirements relating to the internal soundness of products shall be agreed at the time of enquiry and order, if possible with reference to European standards. EN 10160 specifies requirements of ultrasonic testing of flat products of thickness equal to or greater than 6 mm and EN 10308 specifies requirements of ultrasonic testing of steel bars (see A.4).

7.6 Surface quality

7.6.1 All products shall have a smooth finish appropriate to the manufacturing processes applied, see also 6.3.3.

7.6.2 Minor surface imperfections which may occur also under normal manufacturing conditions, such as scores originating from rolled-in scale in the case of hot-rolled products, shall not be regarded as defects.

7.6.3 Where appropriate, requirements relating to the surface quality of the products shall be agreed upon at the time of enquiry and order, if possible with reference to European Standards.

Sheet/plate and wide flats are delivered with surface class A, subclass 1 according to EN 10163-2 unless otherwise agreed at the time of enquiry and order.

Bars and rods are delivered with surface class A according to EN 10221 unless otherwise agreed at the time of enquiry and order.

7.6.4 Requirements relating to the permissible depth of decarburization may be agreed at the time of enquiry and order.

The depth of decarburization shall be determined in accordance with the micrographic method specified in EN ISO 3887.

7.6.5 If suitability of bars and rods for bright drawing is required, this shall be agreed at the time of enquiry and order.

7.6.6 The removal of surface defects by welding shall only be permitted with the approval of the customer or his representative.

If surface discontinuities are repaired, the method and maximum depth of removal shall be agreed at the time of enquiry and order.

7.7 Dimensions, tolerances on dimensions and shape

The nominal dimensions, tolerances on dimensions and shape for the product shall be agreed at the time of enquiry and order, if possible, with reference to the dimensional standards applicable (see EN 10083-1:2006, Annex D).

8 Inspection

8.1 Testing procedures and types of documents

8.1.1 Products complying with this document shall be ordered and delivered with one of the inspection documents as specified in EN 10204. The type of document shall be agreed upon at the time of enquiry and order. If the order does not contain any specification of this type, a test report shall be issued.

8.1.2 For the information to be included in a test report, see EN 10083-1:2006, 8.1.2.

8.1.3 For the information to be included in an inspection certificate, see EN 10083-1:2006 8.1.3.

8.1.4 Unless otherwise agreed at the time of the order, inspection of surface quality and dimensions shall be carried out by the manufacturer.

8.2 Frequency of testing

8.2.1 Sampling

Sampling shall be in accordance with Table 10.

8.2.2 Test units

The test units and the extent of testing shall be in accordance with Table 10.

8.3 Tests to be carried out for specific inspection

8.3.1 Verification of hardenability, hardness and mechanical properties

For steels being ordered without hardenability requirements, i.e. without the symbol +H, +HH or +HL in the designation, the hardness requirements or mechanical properties given for the relevant heat-treatment condition in Table 1, Column 8, subclause 2, shall with the following exception be verified. The requirement given in Table 1, Footnote a (mechanical properties of reference test pieces), is only to be verified if supplementary requirement A.1 is ordered.

For steels being ordered with the symbol +H, +HH or +HL in the designation (see Tables 5 and 6), unless otherwise agreed, only hardenability requirements according to Table 5 or 6 shall be verified.

8.3.2 Visual and dimensional inspection

A sufficient number of products shall be inspected to ensure compliance with the specification.

9 Preparation of samples and test pieces

9.1 Selection and preparation of samples for chemical analysis

The preparation of samples for product analysis shall be in accordance with EN ISO 14284.

9.2 Location and orientation of samples and test pieces for mechanical tests

9.2.1 Preparation of samples

Preparation of samples shall be in accordance with Table 10 and EN 10083-1:2006, 9.2.1.

9.2.2 Preparation of test pieces

Preparation of test pieces shall be in accordance with Table 10 and EN 10083-1:2006, 9.2.2.

9.3 Location and preparation of samples for hardness and hardenability tests

See Table 10.

9.4 Identification of samples and test pieces

Samples and test pieces shall be marked so that the original products and their location and orientation in the product is known.

10 Test methods

10.1 Chemical analysis

See EN 10083-1:2006, 10.1.

10.2 Mechanical tests

See Table 10 and EN 10083-1:2006, 10.2.

10.3 Hardness and hardenability tests

10.3.1 Hardness in treatment conditions +A and +S

For products in treatment conditions +A (soft annealed) and +S (treated to improve shearability), the hardness shall be measured in accordance with EN ISO 6506-1.

10.3.2 Verification of hardenability

As far as available the manufacturer has the option to verify the hardenability by calculation. The calculation method is left to the discretion of the manufacturer. If agreed at the time of enquiry and order the manufacturer shall give sufficient information about the calculation for the customer to confirm the result.

If a calculation formula is not available or in the case of dispute an end quench hardenability test shall be carried out in accordance with EN ISO 642. The temperature for quenching shall comply with table 11. The hardness values shall be determined in accordance with EN ISO 6508-1, scale C.

10.3.3 Surface hardness

The surface hardness of steels after flame or induction hardening (see Table 9) shall be determined in accordance with EN ISO 6508-1, scale C.

10.4 Retests

See EN 10083-1:2006, 10.4.

11 Marking, labelling, packaging

The manufacturer shall mark the products or the bundles or boxes in a suitable way so that it is possible to determine the cast, the steel grade and the origin of the delivery (see A.6).

Table 1 — Combinations of usual heat-treatment conditions at delivery, product forms and requirements as specified in Tables 3 to 8

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | 9 | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------|-----|----------------|-------------------------------------------------------------------------------|------------------------------------|--------------------------------|-------------------------------------------------------|-----|------------------------------------------------|
| 1 | Heat treatment condition at delivery | Symbol | x indicates applicable for | | | | Applicable requirements if the steel is ordered with the designation given in | | | | | |
| | | | Semi-finished products | Bars | Rod | Flat products | Hammer and drop forgings | Table 3 | | Table 5 or 6 | | |
| | | | | | | | | 8.1 | 8.2 | 9.1 | 9.2 | 9.3 |
| 2 | Untreated | none or +U | x | x | x | x | x | a | | As in columns 8.1 and 8.2 (see footnote b in Table 3) | | Hardenability values according to Table 5 or 6 |
| 3 | Treated to improve shearability | +S | x | x | - | x | - | Maximum hardness | Table 7 column +S ^a | | | |
| 4 | Soft annealed | +A | x | x | x | x ^b | x | | Table 7 column +A ^a | | | |
| 5 | Quenched and tempered | +QT | - | x | x | x ^b | x | Mechanical properties according to | Table 8 | Not Applicable | | |
| 6 | Others | Other treatment conditions, e.g. certain annealing conditions to achieve a certain structure may be agreed at the time of enquiry and order. The treatment condition annealed for spheroidal carbide (+AC) as required for cold upsetting and cold extrusion is covered by EN 10263-4. | | | | | | | | | | |
| ^a For deliveries in the untreated condition and in the "treated to improve shearability" and "soft annealed" condition, the mechanical properties specified in Table 8 shall be achievable for the ruling end cross-section after appropriate heat treatment (for verification on reference test pieces, see A.1). | | | | | | | | | | | | |
| ^b It is not possible to deliver all dimensions of flat products in this heat-treatment condition. | | | | | | | | | | | | |

Table 2 — Surface condition at delivery

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|-------------|--------------------------------------------------|------|-----|---------------|--------------------------------------------------------------------|--------------|-------|
| 1 | Surface condition at delivery | | Symbol | x indicates in general applicable for | | | | | | Notes |
| | | | | Semi-finished products (such as blooms, billets) | Bars | Rod | Flat products | Hammer and drop forgings (see note 2 in EN 10083-1:2006, Clause 1) | | |
| 2 | Unless otherwise agreed | Hot worked | None or +HW | x | x | x | x | x | - | |
| 3 | Particular conditions supplied by agreement | Unformed continuously cast | +CC | x | - | - | - | - | - | |
| 4 | | Hot worked and pickled | +PI | x | x | x | x | x | ^a | |
| 5 | | Hot worked and blast cleaned | +BC | x | x | x | x | x | ^a | |
| 6 | | Hot worked and rough machined | +RM | - | x | x | - | x | - | |
| 7 | | Others | - | - | - | - | - | - | - | |
| ^a In addition, it may be agreed that the products be oiled or, where appropriate, limed or phosphated. | | | | | | | | | | |

Table 3 — Steel grades and chemical composition (cast analysis)

| Steel designation Name | Number | Chemical composition % by mass ^{a,b} | | | | | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------------------------|------------|--------------|-----------|----------------|--------------|--------------|--------------|--------------|------------------|
| | | C | Si max. | Mn | P max. | S | Cr | Mo | Ni | V | B |
| Steels without boron ^c | | | | | | | | | | | |
| 38Cr2 | 1.7003 | 0,35 to 0,42 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 0,40 to 0,60 | - | - | - | - |
| 46Cr2 | 1.7006 | 0,42 to 0,50 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 0,40 to 0,60 | - | - | - | - |
| 34Cr4 | 1.7033 | 0,30 to 0,37 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | - | - | - | - |
| 34CrS4 | 1.7037 | | | | | 0,020 to 0,040 | | | | | |
| 37Cr4 | 1.7034 | 0,34 to 0,41 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | - | - | - | - |
| 37CrS4 | 1.7038 | | | | | 0,020 to 0,040 | | | | | |
| 41Cr4 | 1.7035 | 0,38 to 0,45 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | - | - | - | - |
| 41CrS4 | 1.7039 | | | | | 0,020 to 0,040 | | | | | |
| 25CrMo4 | 1.7218 | 0,22 to 0,29 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | 0,15 to 0,30 | - | - | - |
| 25CrMoS4 | 1.7213 | | | | | 0,020 to 0,040 | | | | | |
| 34CrMo4 | 1.7220 | 0,30 to 0,37 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | 0,15 to 0,30 | - | - | - |
| 34CrMoS4 | 1.7226 | | | | | 0,020 to 0,040 | | | | | |
| 42CrMo4 | 1.7225 | 0,38 to 0,45 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,035 | 0,90 to 1,20 | 0,15 to 0,30 | - | - | - |
| 42CrMoS4 | 1.7227 | | | | | 0,020 to 0,040 | | | | | |
| 50CrMo4 | 1.7228 | 0,46 to 0,54 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 0,90 to 1,20 | 0,15 to 0,30 | - | - | - |
| 34CrNiMo6 | 1.6582 | 0,30 to 0,38 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 1,30 to 1,70 | 0,15 to 0,30 | 1,30 to 1,70 | - | - |
| 30CrNiMo8 | 1.6580 | 0,26 to 0,34 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 1,80 to 2,20 | 0,30 to 0,50 | 1,80 to 2,20 | - | - |
| 35NiCr6 | 1.5815 | 0,30 to 0,37 | 0,40 | 0,60 to 0,90 | 0,025 | max. 0,025 | 0,80 to 1,10 | - | 1,20 to 1,60 | - | - |
| 36NiCrMo16 | 1.6773 | 0,32 to 0,39 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,025 | 1,60 to 2,00 | 0,25 to 0,45 | 3,6 to 4,1 | - | - |
| 39NiCrMo3 | 1.6510 | 0,35 to 0,43 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,035 | 0,60 to 1,00 | 0,15 to 0,25 | 0,70 to 1,00 | - | - |
| 30NiCrMo16-6 | 1.6747 | 0,26 to 0,33 | 0,40 | 0,50 to 0,80 | 0,025 | max. 0,025 | 1,20 to 1,50 | 0,30 to 0,60 | 3,3 to 4,3 | - | - |
| 51CrV4 | 1.8159 | 0,47 to 0,55 | 0,40 | 0,70 to 1,10 | 0,025 | max. 0,025 | 0,90 to 1,20 | - | - | 0,10 to 0,25 | - |
| Steels with boron | | | | | | | | | | | |
| 20MnB5 | 1.5530 | 0,17 to 0,23 | 0,40 | 1,10 to 1,40 | 0,025 | max. 0,035 | - | - | - | - | 0,0008 to 0,0050 |
| 30MnB5 | 1.5531 | 0,27 to 0,33 | 0,40 | 1,15 to 1,45 | 0,025 | max. 0,035 | - | - | - | - | 0,0008 to 0,0050 |
| 38MnB5 | 1.5532 | 0,36 to 0,42 | 0,40 | 1,15 to 1,45 | 0,025 | max. 0,035 | - | - | - | - | 0,0008 to 0,0050 |
| 27MnCrB5-2 | 1.7182 | 0,24 to 0,30 | 0,40 | 1,10 to 1,40 | 0,025 | max. 0,035 | 0,30 to 0,60 | - | - | - | 0,0008 to 0,0050 |
| 33MnCrB5-2 | 1.7185 | 0,30 to 0,36 | 0,40 | 1,20 to 1,50 | 0,025 | max. 0,035 | 0,30 to 0,60 | - | - | - | 0,0008 to 0,0050 |
| 39MnCrB6-2 | 1.7189 | 0,36 to 0,42 | 0,40 | 1,40 to 1,70 | 0,025 | max. 0,035 | 0,30 to 0,60 | - | - | - | 0,0008 to 0,0050 |
| <p>^a Elements not quoted in this table shall not be intentionally added to the steel without the agreement of the purchaser, other than for the purpose of finishing the heat and for boron to have its effect on the hardenability. All reasonable precautions shall be taken to prevent the addition of such elements from scrap or other material used in the manufacture which affect the hardenability, mechanical properties and applicability.</p> <p>^b Where requirements are made on hardenability (see Tables 5 and 6) or on the mechanical properties in the quenched and tempered condition (see Table 8), slight deviations from the limits for the cast analysis are permissible, except for the elements carbon, phosphorus and sulfur; the deviations shall not exceed the specifications of Table 4.</p> <p>^c Steels with improved machinability as a result of the addition of higher sulphur contents up to around 0,10% S (including resulphurized steels with controlled inclusion content (e.g. Ca-treatment)) may be supplied on request. In this case the upper limit for the manganese content may be increased by 0,15 %.</p> | | | | | | | | | | | |

Table 4 — Permissible deviations between the product analysis and the limiting values given in Table 3 for the cast analysis

| Element | Permissible maximum content in the cast analysis % by mass | Permissible deviation ^a % by mass |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-------------------------------------------------|
| C | ≤ 0,55 | ± 0,02 |
| Si | ≤ 0,40 | + 0,03 |
| Mn | ≤ 1,00 | ± 0,04 |
| | > 1,00 ≤ 1,70 | ± 0,05 |
| P | ≤ 0,025 | + 0,005 |
| S | ≤ 0,040 | + 0,005 ^b |
| Cr | ≤ 2,00 | ± 0,05 |
| | > 2,00 ≤ 2,20 | ± 0,10 |
| Mo | ≤ 0,30 | ± 0,03 |
| | > 0,30 ≤ 0,60 | ± 0,04 |
| Ni | ≤ 2,00 | ± 0,05 |
| | > 2,00 ≤ 4,3 | ± 0,07 |
| V | ≤ 0,25 | ± 0,02 |
| B | ≤ 0,0050 | ± 0,0003 |
| ^a ± means that in one cast, the deviation may occur over the upper value or under the lower value of the specified range in Table 3, but not both at the same time. | | |
| ^b For steels with a specified sulphur range of 0,020% to 0,040% according to cast analysis, the permissible deviation is ± 0,005%. | | |

Table 5 — Limiting values for the "C" scale Rockwell hardness for special steel grades with (normal) hardenability requirements (+H grades)

| Steel designation | | Symbol | Limits of range | Distance in mm from quenched end | | | | | | | | | | | | | | |
|----------------------|--------|--------|-----------------|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Name | Number | | | Hardness in HRC | | | | | | | | | | | | | | |
| | | | | 1,5 | 3 | 5 | 7 | 9 | 11 | 13 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| Steels without boron | | | | | | | | | | | | | | | | | | |
| 38Cr2 | 1.7003 | +H | max. | 59 | 57 | 54 | 49 | 43 | 39 | 37 | 35 | 32 | 30 | 27 | - | - | - | - |
| | | | min. | 51 | 46 | 37 | 29 | 25 | 22 | 20 | - | - | - | - | - | - | - | - |
| 46Cr2 | 1.7006 | +H | max. | 63 | 61 | 59 | 57 | 53 | 47 | 42 | 39 | 36 | 33 | 32 | - | - | - | - |
| | | | min. | 54 | 49 | 40 | 32 | 28 | 25 | 23 | 22 | 20 | - | - | - | - | - | - |
| 34Cr4 34Cr4S | 1.7033 | +H | max. | 57 | 57 | 56 | 54 | 52 | 49 | 46 | 44 | 39 | 37 | 35 | 34 | 33 | 32 | 31 |
| | 1.7037 | | min. | 49 | 48 | 45 | 41 | 35 | 32 | 29 | 27 | 23 | 21 | 20 | - | - | - | - |
| 37Cr4 37CrS4 | 1.7034 | +H | max. | 59 | 59 | 58 | 57 | 55 | 52 | 50 | 48 | 42 | 39 | 37 | 36 | 35 | 34 | 33 |
| | 1.7038 | | min. | 51 | 50 | 48 | 44 | 39 | 36 | 33 | 31 | 26 | 24 | 22 | 20 | - | - | - |
| 41Cr4 41CrS4 | 1.7035 | +H | max. | 61 | 61 | 60 | 59 | 58 | 56 | 54 | 52 | 46 | 42 | 40 | 38 | 37 | 36 | 35 |
| | 1.7039 | | min. | 53 | 52 | 50 | 47 | 41 | 37 | 34 | 32 | 29 | 26 | 23 | 21 | - | - | - |
| 25CrMo4 25CrMoS4 | 1.7218 | +H | max. | 52 | 52 | 51 | 50 | 48 | 46 | 43 | 41 | 37 | 35 | 33 | 32 | 31 | 31 | 31 |
| | 1.7213 | | min. | 44 | 43 | 40 | 37 | 34 | 32 | 29 | 27 | 23 | 21 | 20 | - | - | - | - |
| 34CrMo4 34CrMoS4 | 1.7220 | +H | max. | 57 | 57 | 57 | 56 | 55 | 54 | 53 | 52 | 48 | 45 | 43 | 41 | 40 | 40 | 39 |
| | 1.7226 | | min. | 49 | 49 | 48 | 45 | 42 | 39 | 36 | 34 | 30 | 28 | 27 | 26 | 25 | 24 | 24 |
| 42CrMo4 42CrMoS4 | 1.7225 | +H | max. | 61 | 61 | 61 | 60 | 60 | 59 | 59 | 58 | 56 | 53 | 51 | 48 | 47 | 46 | 45 |
| | 1.7227 | | min. | 53 | 53 | 52 | 51 | 49 | 43 | 40 | 37 | 34 | 32 | 31 | 30 | 30 | 29 | 29 |
| 50CrMo4 | 1.7228 | +H | max. | 65 | 65 | 64 | 64 | 63 | 63 | 63 | 62 | 61 | 60 | 58 | 57 | 55 | 54 | 54 |
| | | | min. | 58 | 58 | 57 | 55 | 54 | 53 | 51 | 48 | 45 | 41 | 39 | 38 | 37 | 36 | 36 |
| 34CrNiMo6 | 1.6582 | +H | max. | 58 | 58 | 58 | 58 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 |
| | | | min. | 50 | 50 | 50 | 50 | 49 | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 47 | 46 | 45 |
| 30CrNiMo8 | 1.6580 | +H | max. | 56 | 56 | 56 | 56 | 55 | 55 | 55 | 55 | 55 | 54 | 54 | 54 | 54 | 54 | 54 |
| | | | min. | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 46 | 46 | 45 | 45 | 44 | 44 | 44 | 43 |
| 35NiCr6 | 1.5815 | +H | max. | 58 | 58 | 58 | 57 | 57 | 55 | 55 | 55 | 53 | 53 | 50 | 50 | - | - | - |
| | | | min. | 49 | 49 | 49 | 48 | 48 | 44 | 44 | 44 | 40 | 40 | 35 | 35 | - | - | - |
| 36NiCrMo16 | 1.6773 | +H | max. | 57 | 56 | 56 | 56 | 56 | 56 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 |
| | | | min. | 50 | 49 | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 47 | 47 | 47 | 47 | 47 | 47 |
| 39NiCrMo3 | 1.6510 | +H | max. | 60 | 60 | 59 | 58 | 58 | 57 | 57 | 56 | 55 | 52 | 51 | 49 | 48 | 46 | 45 |
| | | | min. | 52 | 51 | 50 | 49 | 48 | 46 | 44 | 43 | 39 | 36 | 34 | 33 | 32 | 31 | 30 |

Table 5 – (continued)

| Steel designation | | Symbol | Limits of range | Distance in mm from quenched end | | | | | | | | | | | | | | |
|----------------------------------|--------|--------|-----------------|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Name | Number | | | Hardness in HRC | | | | | | | | | | | | | | |
| | | | | 1,5 | 3 | 5 | 7 | 9 | 11 | 13 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| Steels without boron (continued) | | | | | | | | | | | | | | | | | | |
| 30NiCrMo16-6 | 1.6747 | +H | max. | 55 | 55 | 55 | 54 | 54 | 54 | 54 | 54 | 53 | 53 | 53 | 53 | 53 | 53 | 53 |
| | | | min. | 47 | 47 | 47 | 46 | 46 | 46 | 46 | 46 | 46 | 45 | 45 | 45 | 45 | 45 | 45 |
| 51CrV4 | 1.8159 | +H | max. | 65 | 65 | 64 | 64 | 63 | 63 | 63 | 62 | 62 | 62 | 61 | 60 | 60 | 59 | 58 |
| | | | min. | 57 | 56 | 56 | 55 | 53 | 52 | 50 | 48 | 44 | 41 | 37 | 35 | 34 | 33 | 32 |
| Steels with boron | | | | | | | | | | | | | | | | | | |
| 20MnB5 | 1.5530 | +H | max. | 50 | 49 | 49 | 49 | 47 | 45 | 43 | 41 | 33 | 27 | - | - | - | - | - |
| | | | min. | 42 | 41 | 40 | 37 | 30 | 22 | - | - | - | - | - | - | - | - | - |
| 30MnB5 | 1.5531 | +H | max. | 56 | 55 | 55 | 54 | 53 | 51 | 50 | 47 | 40 | 37 | 33 | - | - | - | - |
| | | | min. | 47 | 46 | 45 | 44 | 42 | 39 | 36 | 31 | 22 | - | - | - | - | - | - |
| 38MnB5 | 1.5532 | +H | max. | 60 | 60 | 59 | 58 | 57 | 57 | 55 | 53 | 48 | 41 | 37 | 33 | 31 | - | - |
| | | | min. | 52 | 51 | 50 | 49 | 47 | 44 | 41 | 35 | 28 | 24 | 20 | - | - | - | - |
| 27MnCrB5-2 | 1.7182 | +H | max. | 55 | 55 | 55 | 54 | 54 | 53 | 52 | 51 | 47 | 44 | 40 | 37 | - | - | - |
| | | | min. | 47 | 46 | 45 | 44 | 43 | 41 | 39 | 36 | 30 | 24 | 20 | - | - | - | - |
| 33MnCrB5-2 | 1.7185 | +H | max. | 57 | 57 | 57 | 57 | 57 | 56 | 55 | 54 | 53 | 50 | 47 | 45 | - | - | - |
| | | | min. | 48 | 47 | 47 | 46 | 45 | 44 | 43 | 41 | 36 | 31 | 25 | 20 | - | - | - |
| 39MnCrB6-2 | 1.7189 | +H | max. | 59 | 59 | 59 | 59 | 58 | 58 | 58 | 58 | 57 | 57 | 56 | 55 | 54 | - | - |
| | | | min. | 51 | 51 | 51 | 51 | 50 | 50 | 50 | 49 | 47 | 45 | 40 | 35 | 32 | - | - |

Table 6 — Limiting values for the C scale Rockwell hardness for special steel grades with restricted hardenability scatter bands (+HH and +HL grades)

| Steel designation | | Symbol | Limits of range | Distance in mm from quenched end | | | | | | | | | | | | | | |
|-------------------|--------|--------|-----------------|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Name | Number | | | HRC Hardness | | | | | | | | | | | | | | |
| | | | | 1,5 | 3 | 5 | 7 | 9 | 11 | 13 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| 38Cr2 | 1.7003 | +HH | max. | 59 | 57 | 54 | 49 | 43 | 39 | 37 | 35 | 32 | 30 | 27 | - | - | - | - |
| | | | min. | 54 | 50 | 43 | 36 | 31 | 28 | 26 | 24 | 21 | - | - | - | - | - | - |
| | | +HL | max. | 56 | 53 | 48 | 42 | 37 | 33 | 31 | 29 | 26 | 24 | 21 | - | - | - | - |
| | | | min. | 51 | 46 | 37 | 29 | 25 | 22 | 20 | - | - | - | - | - | - | - | - |
| 46Cr2 | 1.7006 | +HH | max. | 63 | 61 | 59 | 57 | 53 | 47 | 42 | 39 | 36 | 33 | 32 | - | - | - | - |
| | | | min. | 57 | 53 | 46 | 40 | 36 | 32 | 29 | 28 | 25 | 22 | 21 | - | - | - | - |
| | | +HL | max. | 60 | 57 | 53 | 49 | 45 | 40 | 36 | 33 | 31 | 28 | 27 | - | - | - | - |
| | | | min. | 54 | 49 | 40 | 32 | 28 | 25 | 23 | 22 | 20 | - | - | - | - | - | - |
| 34Cr4 | 1.7033 | +HH | max. | 57 | 57 | 56 | 54 | 52 | 49 | 46 | 44 | 39 | 37 | 35 | 34 | 33 | 32 | 31 |
| | | | min. | 52 | 51 | 49 | 45 | 41 | 38 | 35 | 33 | 28 | 26 | 25 | 24 | 23 | 22 | 21 |
| 34Cr4S | 1.7037 | +HL | max. | 54 | 54 | 52 | 50 | 46 | 43 | 40 | 38 | 34 | 32 | 30 | 29 | 28 | 27 | 26 |
| | | | min. | 49 | 48 | 45 | 41 | 35 | 32 | 29 | 27 | 23 | 21 | 20 | - | - | - | - |
| 37Cr4 | 1.7034 | +HH | max. | 59 | 59 | 58 | 57 | 55 | 52 | 50 | 48 | 42 | 39 | 37 | 36 | 35 | 34 | 33 |
| | | | min. | 54 | 53 | 51 | 48 | 44 | 41 | 39 | 37 | 31 | 29 | 27 | 25 | 24 | 23 | 22 |
| 37CrS4 | 1.7038 | +HL | max. | 56 | 56 | 55 | 53 | 50 | 47 | 44 | 42 | 37 | 34 | 32 | 31 | 30 | 29 | 28 |
| | | | min. | 51 | 50 | 48 | 44 | 39 | 36 | 33 | 31 | 26 | 24 | 22 | 20 | - | - | - |
| 41Cr4 | 1.7035 | +HH | max. | 61 | 61 | 60 | 59 | 58 | 56 | 54 | 52 | 46 | 42 | 40 | 38 | 37 | 36 | 35 |
| | | | min. | 56 | 55 | 53 | 51 | 47 | 43 | 41 | 39 | 35 | 31 | 29 | 27 | 26 | 25 | 24 |
| 41CrS4 | 1.7039 | +HL | max. | 58 | 58 | 57 | 55 | 52 | 50 | 47 | 45 | 40 | 37 | 34 | 32 | 31 | 30 | 29 |
| | | | min. | 53 | 52 | 50 | 47 | 41 | 37 | 34 | 32 | 29 | 26 | 23 | 21 | - | - | - |
| 25CrMo4 | 1.7218 | +HH | max. | 52 | 52 | 51 | 50 | 48 | 46 | 43 | 41 | 37 | 35 | 33 | 32 | 31 | 31 | 31 |
| | | | min. | 47 | 46 | 44 | 41 | 39 | 37 | 34 | 32 | 28 | 26 | 24 | 23 | 22 | 22 | 22 |
| 25CrMoS4 | 1.7213 | +HL | max. | 49 | 49 | 47 | 46 | 43 | 41 | 38 | 36 | 32 | 30 | 29 | 28 | 27 | 27 | 27 |
| | | | min. | 44 | 43 | 40 | 37 | 34 | 32 | 29 | 27 | 23 | 21 | 20 | - | - | - | - |
| 34CrMo4 | 1.7220 | +HH | max. | 57 | 57 | 57 | 56 | 55 | 54 | 53 | 52 | 48 | 45 | 43 | 41 | 40 | 40 | 39 |
| | | | min. | 52 | 52 | 51 | 49 | 46 | 44 | 42 | 40 | 36 | 34 | 32 | 31 | 30 | 29 | 29 |
| 34CrMoS4 | 1.7226 | +HL | max. | 54 | 54 | 54 | 52 | 51 | 49 | 47 | 46 | 42 | 39 | 38 | 36 | 35 | 35 | 34 |
| | | | min. | 49 | 49 | 48 | 45 | 42 | 39 | 36 | 34 | 30 | 28 | 27 | 26 | 25 | 24 | 24 |
| 42CrMo4 | 1.7225 | +HH | max. | 61 | 61 | 61 | 60 | 60 | 59 | 59 | 58 | 56 | 53 | 51 | 48 | 47 | 46 | 45 |
| | | | min. | 56 | 56 | 55 | 54 | 52 | 48 | 46 | 44 | 41 | 39 | 38 | 36 | 36 | 35 | 34 |
| 42CrMoS4 | 1.7227 | +HL | max. | 58 | 58 | 58 | 57 | 56 | 54 | 53 | 51 | 49 | 46 | 44 | 42 | 41 | 40 | 40 |
| | | | min. | 53 | 53 | 52 | 51 | 49 | 43 | 40 | 37 | 34 | 32 | 31 | 30 | 30 | 29 | 29 |

Table 6 – (continued)

| Steel designation | | Symbol | Limits of range | Distance in mm from quenched end | | | | | | | | | | | | | | | |
|-------------------|--------|--------|-----------------|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | | | HRC Hardness | | | | | | | | | | | | | | | |
| Name | Number | | | 1,5 | 3 | 5 | 7 | 9 | 11 | 13 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | |
| 50CrMo4 | 1.7228 | +HH | max. | 65 | 65 | 64 | 64 | 63 | 63 | 63 | 62 | 61 | 60 | 58 | 57 | 55 | 54 | 54 | |
| | | | min. | 60 | 60 | 59 | 58 | 57 | 56 | 55 | 53 | 50 | 47 | 45 | 44 | 43 | 42 | 42 | |
| | | +HL | max. | 63 | 63 | 62 | 61 | 60 | 60 | 59 | 57 | 56 | 54 | 52 | 51 | 49 | 48 | 48 | |
| | | | min. | 58 | 58 | 57 | 55 | 54 | 53 | 51 | 48 | 45 | 41 | 39 | 38 | 37 | 36 | 36 | |
| 34CrNiMo6 | 1.6582 | +HH | max. | 58 | 58 | 58 | 58 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | 57 | |
| | | | min. | 53 | 53 | 53 | 53 | 52 | 51 | 51 | 51 | 51 | 50 | 50 | 50 | 50 | 49 | 48 | |
| | | +HL | max. | 55 | 55 | 55 | 55 | 54 | 54 | 54 | 54 | 54 | 54 | 54 | 54 | 54 | 53 | 53 | 53 |
| | | | min. | 50 | 50 | 50 | 50 | 49 | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 46 | 45 | 44 | |
| 30CrNiMo8 | 1.6580 | +HH | max. | 56 | 56 | 56 | 56 | 55 | 55 | 55 | 55 | 55 | 54 | 54 | 54 | 54 | 54 | 54 | |
| | | | min. | 51 | 51 | 51 | 51 | 50 | 50 | 50 | 49 | 49 | 48 | 48 | 47 | 47 | 47 | 47 | |
| | | +HL | max. | 53 | 53 | 53 | 53 | 52 | 52 | 52 | 52 | 52 | 51 | 51 | 51 | 51 | 50 | 50 | |
| | | | min. | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 46 | 46 | 45 | 45 | 44 | 44 | 43 | 43 | |
| 35NiCr6 | 1.5815 | +HH | max. | 58 | 58 | 58 | 57 | 57 | 55 | 55 | 55 | 53 | 53 | 50 | 50 | - | - | - | |
| | | | min. | 53 | 53 | 53 | 52 | 52 | 50 | 50 | 50 | 48 | 48 | 45 | 45 | - | - | - | |
| | | +HL | max. | 54 | 54 | 54 | 53 | 53 | 49 | 49 | 49 | 45 | 45 | 40 | 40 | - | - | - | |
| | | | min. | 49 | 49 | 49 | 48 | 48 | 44 | 44 | 44 | 40 | 40 | 35 | 35 | - | - | - | |
| 36NiCrMo16 | 1.6773 | +HH | max. | 57 | 56 | 56 | 56 | 56 | 56 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | |
| | | | min. | 52 | 51 | 51 | 51 | 51 | 51 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | |
| | | +HL | max. | 55 | 54 | 53 | 53 | 53 | 53 | 52 | 52 | 52 | 52 | 52 | 52 | 52 | 52 | 52 | |
| | | | min. | 50 | 49 | 48 | 48 | 48 | 48 | 47 | 47 | 47 | 47 | 47 | 47 | 47 | 47 | 47 | |
| 39NiCrMo3 | 1.6510 | +HH | max. | 60 | 60 | 59 | 58 | 58 | 57 | 57 | 56 | 55 | 52 | 51 | 49 | 48 | 46 | 45 | |
| | | | min. | 55 | 54 | 53 | 52 | 51 | 50 | 48 | 47 | 44 | 41 | 40 | 38 | 37 | 36 | 35 | |
| | | +HL | max. | 57 | 57 | 56 | 55 | 55 | 53 | 53 | 52 | 50 | 47 | 45 | 44 | 43 | 41 | 40 | |
| | | | min. | 52 | 51 | 50 | 49 | 48 | 46 | 44 | 43 | 39 | 36 | 34 | 33 | 32 | 31 | 30 | |
| 30NiCrMo16-6 | 1.6747 | +HH | max. | 55 | 55 | 55 | 54 | 54 | 54 | 54 | 54 | 53 | 53 | 53 | 53 | 53 | 53 | 53 | |
| | | | min. | 50 | 50 | 50 | 49 | 49 | 49 | 49 | 49 | 48 | 48 | 48 | 48 | 48 | 48 | 48 | |
| | | +HL | max. | 52 | 52 | 52 | 51 | 51 | 51 | 51 | 51 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | |
| | | | min. | 47 | 47 | 47 | 46 | 46 | 46 | 46 | 46 | 45 | 45 | 45 | 45 | 45 | 45 | 45 | |
| 51CrV4 | 1.8159 | +HH | max. | 65 | 65 | 64 | 64 | 63 | 63 | 63 | 62 | 62 | 62 | 61 | 60 | 60 | 59 | 58 | |
| | | | min. | 60 | 59 | 59 | 58 | 56 | 56 | 54 | 53 | 50 | 48 | 45 | 43 | 43 | 42 | 41 | |
| | | +HL | max. | 62 | 62 | 61 | 61 | 60 | 59 | 59 | 57 | 56 | 55 | 53 | 52 | 51 | 50 | 49 | |
| | | | min. | 57 | 56 | 56 | 55 | 53 | 52 | 50 | 48 | 44 | 41 | 37 | 35 | 34 | 33 | 32 | |

Table 7 — Maximum hardness for products to be supplied in the "treated to improve shearability (+S)" or "soft annealed (+A)" condition

| Steel designation ^a | | Max. HBW in condition ^b | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------|----------------|
| Name | Number | +S | +A |
| 38Cr2 | 1.7003 | 255 | 207 |
| 46Cr2 | 1.7006 | 255 | 223 |
| 34Cr4, 34CrS4 | 1.7033, 1.7037 | 255 | 223 |
| 37Cr4, 37CrS4 | 1.7034, 1.7038 | 255 | 235 |
| 41Cr4, 41CrS4 | 1.7035, 1.7039 | 255 ^c | 241 |
| 25CrMo4, 25CrMoS4 | 1.7218, 1.7213 | 255 | 212 |
| 34CrMo4, 34CrMoS4 | 1.7220, 1.7226 | 255 ^c | 223 |
| 42CrMo4, 42CrMoS4 | 1.7225, 1.7227 | 255 ^c | 241 |
| 50CrMo4 | 1.7228 | - ^d | 248 |
| 34CrNiMo6 | 1.6582 | - ^d | 248 |
| 30CrNiMo8 | 1.6580 | - ^d | 248 |
| 35NiCr6 | 1.5815 | - ^d | 223 |
| 36NiCrMo16 | 1.6773 | - ^d | 269 |
| 39NiCrMo3 | 1.6510 | - ^d | 240 |
| 30NiCrMo16-6 | 1.6747 | - ^d | 270 |
| 51CrV4 | 1.8159 | - ^d | 248 |
| 20MnB5 | 1.5530 | - ^e | - ^f |
| 30MnB5 | 1.5531 | - ^e | - ^f |
| 38MnB5 | 1.5532 | - ^e | - ^f |
| 27MnCrB5-2 | 1.7182 | - ^e | - ^f |
| 33MnCrB5-2 | 1.7185 | 255 | - ^f |
| 39MnCrB6-2 | 1.7189 | 255 | - ^f |
| ^a The values apply also for the steel with hardenability requirements (+H-, +HH- and +HL-grades) covered in Tables 5 and 6; see, however, footnote c. ^b The values are not applicable to slabs which have been continuously cast and not further deformed. ^c Depending on the chemical composition of the cast, and on the dimensions, particularly in the case of the +HH-grades, soft annealing may be necessary. ^d Where the shearability is of importance, this steel should be ordered in the "soft-annealed" condition. ^e Shearable in the untreated condition. ^f Condition +A is not applicable for boron steels. | | | |

Table 8 — Mechanical properties ^a at room temperature in the quenched and tempered condition (+QT)

| Steel designation Name | | Mechanical properties for the ruling section (see EN 10083-1:2006, Annex A) with a diameter (<i>d</i>) or for flat products thickness (<i>t</i>) of | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|-----------------------------------------------------|----------------------|------------------|------------------|-------------------------------|-------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|---------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|----------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|
| | | <i>d</i> ≤ 16 mm <i>t</i> ≤ 8 mm | | | | | 16 mm < <i>d</i> ≤ 40 mm 8 mm < <i>t</i> ≤ 20 mm | | | | | 40 mm < <i>d</i> ≤ 100 mm 20 mm < <i>t</i> ≤ 60 mm | | | | | 100 mm < <i>d</i> ≤ 160 mm 60 mm < <i>t</i> ≤ 100 mm | | | | | 160 mm < <i>d</i> ≤ 250 mm 100 mm < <i>t</i> ≤ 160 mm | | | | |
| | | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. |
| | | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | | % | % |
| 38Cr2 | 1.7003 | 550 | 800 to 950 | 14 | 35 | - | 450 | 700 to 850 | 15 | 40 | 35 | 350 | 600 to 750 | 17 | 45 | 35 | - | - | - | - | - | - | - | - | - | - |
| 46Cr2 | 1.7006 | 650 | 900 to 1100 | 12 | 35 | - | 550 | 800 to 950 | 14 | 40 | 35 | 400 | 650 to 800 | 15 | 45 | 35 | - | - | - | - | - | - | - | - | - | - |
| 34Cr4 34CrS4 | 1.7033 1.7037 | 700 | 900 to 1100 | 12 | 35 | - | 590 | 800 to 950 | 14 | 40 | 40 | 460 | 700 to 850 | 15 | 45 | 40 | - | - | - | - | - | - | - | - | - | - |
| 37Cr4 37CrS4 | 1.7034 1.7038 | 750 | 950 to 1150 | 11 | 35 | - | 630 | 850 to 1000 | 13 | 40 | 35 | 510 | 750 to 900 | 14 | 40 | 35 | - | - | - | - | - | - | - | - | - | - |
| 41Cr4 41CrS4 | 1.7035 1.7039 | 800 | 1000 to 1200 | 11 | 30 | - | 660 | 900 to 1100 | 12 | 35 | 35 | 560 | 800 to 950 | 14 | 40 | 35 | - | - | - | - | - | - | - | - | - | - |
| 25CrMo4 25CrMoS4 | 1.7218 1.7213 | 700 | 900 to 1100 | 12 | 50 | - | 600 | 800 to 950 | 14 | 55 | 50 | 450 | 700 to 850 | 15 | 60 | 50 | 400 | 650 to 800 | 16 | 60 | 45 | - | - | - | - | - |
| 34CrMo4 34CrMoS4 | 1.7220 1.7226 | 800 | 1000 to 1200 | 11 | 45 | - | 650 | 900 to 1100 | 12 | 50 | 40 | 550 | 800 to 950 | 14 | 55 | 45 | 500 | 750 to 900 | 15 | 55 | 45 | 450 | 700 to 850 | 15 | 60 | 45 |
| 42CrMo4 42CrMoS4 | 1.7225 1.7227 | 900 | 1100 to 1300 | 10 | 40 | - | 750 | 1000 to 1200 | 11 | 45 | 35 | 650 | 900 to 1100 | 12 | 50 | 35 | 550 | 800 to 950 | 13 | 50 | 35 | 500 | 750 to 900 | 14 | 55 | 35 |
| 50CrMo4 | 1.7228 | 900 | 1100 to 1300 | 9 | 40 | - | 780 | 1000 to 1200 | 10 | 45 | 30 | 700 | 900 to 1100 | 12 | 50 | 30 | 650 | 850 to 1000 | 13 | 50 | 30 | 550 | 800 to 950 | 13 | 50 | 30 |
| 34CrNiMo6 | 1.6582 | 1000 | 1200 to 1400 | 9 | 40 | - | 900 | 1100 to 1300 | 10 | 45 | 45 | 800 | 1000 to 1200 | 11 | 50 | 45 | 700 | 900 to 1100 | 12 | 55 | 45 | 600 | 800 to 950 | 13 | 55 | 45 |
| 30CrNiMo8 | 1.6580 | 1050 | 1250 to 1450 | 9 | 40 | - | 1050 | 1250 to 1450 | 9 | 40 | 30 | 900 | 1000 to 1300 | 10 | 45 | 35 | 800 | 1000 to 1200 | 11 | 50 | 45 | 700 | 900 to 1100 | 12 | 50 | 45 |
| 35NiCr6 | 1.5815 | 740 | 880 to 1080 | 12 | 40 | - | 740 | 880 to 1080 | 14 | 40 | 35 | 640 | 780 to 980 | 15 | 40 | 35 | - | - | - | - | - | - | - | - | - | - |
| 36NiCrMo16 | 1.6773 | 1050 | 1250 to 1450 | 9 | 40 | - | 1050 | 1250 to 1450 | 9 | 40 | 30 | 900 | 1100 to 1300 | 10 | 45 | 35 | 800 | 1000 to 1200 | 11 | 50 | 45 | 800 | 1000 to 1200 | 11 | 50 | 45 |
| 39NiCrMo3 | 1.6510 | 785 | 980 to 1180 | 11 | 40 | - | 735 | 930 to 1130 | 11 | 40 | 35 | 685 | 880 to 1080 | 12 | 45 | 40 | 635 | 830 to 980 | 12 | 50 | 40 | 540 | 740 to 880 | 13 | 50 | 40 |
| 30NiCrMo16-6 | 1.6747 | 880 | 1080 to 1230 | 10 | 45 | - | 880 | 1080 to 1230 | 10 | 45 | 35 | 880 | 1080 to 1230 | 10 | 45 | 35 | 790 | 900 to 1050 | 11 | 50 | 35 | 880 | 900 to 1050 | 11 | 50 | 35 |
| 51CrV4 | 1.8159 | 900 | 1100 to 1300 | 9 | 40 | - | 800 | 1000 to 1200 | 10 | 45 | 30 | 700 | 900 to 1100 | 12 | 50 | 30 | 650 | 850 to 1000 | 13 | 50 | 30 | 600 | 800 to 950 | 13 | 50 | 30 |
| 20MnB5 | 1.5530 | 700 | 900 to 1050 | 14 | 55 | - | 600 | 750 to 900 | 15 | 55 | 60 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 30MnB5 | 1.5531 | 800 | 950 to 1150 | 13 | 50 | - | 650 | 800 to 950 | 13 | 50 | 60 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

Table 8 – (continued)

| Steel designation | | Mechanical properties for the ruling section (see EN 10083-1:2006, Annex A) with a diameter (<i>d</i>) or for flat products thickness (<i>t</i>) of | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|-----------------------------------------------------|----------------------|------------------|------------------|-------------------------------|-------------------------------------------------------|---------------------------|------------------|------------------|-------------------------------|---------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|----------------------------------------------------------|----------------------|------------------|------------------|-------------------------------|---|
| | | <i>d</i> ≤ 16 mm <i>t</i> ≤ 8 mm | | | | | 16 mm < <i>d</i> ≤ 40 mm 8 mm < <i>t</i> ≤ 20 mm | | | | | 40 mm < <i>d</i> ≤ 100 mm 20 mm < <i>t</i> ≤ 60 mm | | | | | 100 mm < <i>d</i> ≤ 160 mm 60 mm < <i>t</i> ≤ 100 mm | | | | | 160 mm < <i>d</i> ≤ 250 mm 100 mm < <i>t</i> ≤ 160 mm | | | | | |
| Name | Name | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | <i>R_e</i> min. | <i>R_m</i> | <i>A</i> min. | <i>Z</i> min. | <i>KV^b</i> min. | |
| | | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | % | % | J | MPa ^c | | % | % | J | |
| 38MnB5 | 1.5532 | 900 | 1050 to 1250 | 12 | 50 | - | 700 | 850 to 1050 | 12 | 50 | 60 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 27MnCrB5-2 | 1.7182 | 800 | 1000 to 1250 | 14 | 55 | - | 750 | 900 to 1150 | 14 | 55 | 60 | 700 ^d | 800 to 1000 ^d | 15 ^d | 55 ^d | 65 ^d | - | - | - | - | - | - | - | - | - | - | - |
| 33MnCrB5-2 | 1.7185 | 850 | 1050 to 1300 | 13 | 50 | - | 800 | 950 to 1200 | 13 | 50 | 50 | 750 ^d | 900 to 1100 ^d | 13 ^d | 50 ^d | 50 ^d | - | - | - | - | - | - | - | - | - | - | - |
| 39MnCrB6-2 | 1.7189 | 900 | 1100 to 1350 | 12 | 50 | - | 850 | 1050 to 1250 | 12 | 50 | 40 | 800 ^d | 1000 to 1200 ^d | 12 ^d | 50 ^d | 40 ^d | - | - | - | - | - | - | - | - | - | - | - |

^a *R_e*: Upper yield strength or, if no yield phenomenon occurs, 0,2 % proof strength *R_{p0,2}*.
R_m: Tensile strength.
A: Percentage elongation after fracture (initial gauge length *L₀* = 5,65 √*S₀* ; see Table 10, column 7a, line T4).
Z: Reduction in cross section on fracture.
KV: Impact strength of longitudinal Charpy-V-notch test pieces (average of 3 individual values shall meet the minimum specified in the table; no individual value shall be lower than 70 % of the minimum shown in the table.)

^b For sampling see EN 10083-1:2006 fig.1 and fig.3.

^c 1 MPa = 1 N/mm².

^d For 40 mm < *d* ≤ 60 mm and 20 mm < *t* ≤ 40 mm.

**Table 9 — Surface hardness of steels
after flame or induction hardening**

| Steel designation | | Surface hardness |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------|
| | | HRC |
| | | min. |
| Name | Number | |
| 46Cr2 | 1.7006 | 54 |
| 37Cr4/37CrS4 | 1.7034/1.7038 | 51 |
| 41Cr4/41CrS4 | 1.7035/1.7039 | 53 |
| 42CrMo4/42CrMo4 | 1.7225/1.7227 | 53 |
| 50CrMo4 | 1.7228 | 58 |
| <p>^a The above values apply for the condition existing after quenching and tempering and surface hardening according to the conditions given in Table 11 followed by stress relieving at 150°C to 180°C for about 1h, and they relate to cross-sections up to 100 mm diameter for the steels 46Cr2, 37Cr4/37CrS4 and 41Cr4/41CrS4, and up to 250 mm diameter for the steels 42CrMo4/42CrMoS4 and 50CrMo4. It should be noted that surface decarburization may lead to lower hardness values in the surface hardened zones.</p> | | |

Table 10 — Test conditions for the verification of the requirements given in column 2

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | (Supplement to Table 10, columns 6 and 7) | | |
|-----|----------------------|------------------------|----------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | | | | Line | 6a | 7a |
| No. | Requirements | Test unit ^a | Extent of testing | | Sampling and sample preparation (see in the supplement to this table, line T1 and line ...) | Test method to be applied | | 6a | 7a |
| | See Table | | Number of products per test unit | Number of tests per product | | | | Sampling and sample preparation | Test method to be applied |
| 1 | Chemical composition | 3 + 4 | C | (The cast analysis is given by the manufacturer, for product analysis see clause A.5 in annex A) | | | T1 | General conditions The general conditions for selection and preparation of test samples and test pieces for steel shall be in accordance with EN ISO 377 and EN ISO 14284. | |
| 2 | Hardenability | 5 and 6 | C | 1 | 1 | T2 | T2 | End quench hardenability test. In the case of dispute if possible the sampling method given below shall be used: <ul style="list-style-type: none"> — the test piece shall be produced by machining in the case of diameters ≤ 40 mm; — the bar shall be reduced by forging to a diameter of 40 mm in the case of diameters > 40 ≤ 150 mm; — in the case of diameters > 150 mm the test piece shall be taken such that, its axis lies 20 mm below the surface. In all other cases, the sampling method which starts from separately cast and subsequently hot worked test ingots or from cast and not hot worked samples is, unless otherwise agreed at the time of enquiry and order, left to the discretion of the manufacturer. | In accordance with EN ISO 642. The temperature for quenching shall comply with Table 11. The hardness values shall be determined in accordance with EN ISO 6508-1, scale C. |

Table 10 – (continued)

| 1 | 2 | | 3 | 4 | | 5 | 6 | 7 | (Supplement to Table 10, columns 6 and 7) | | |
|-----|---------------------------|-----------|------------------------|----------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------|---------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----|
| | | | | | | | | | Line | 6a | 7a |
| No. | Requirements | | Test unit ^a | Number of products per test unit | Number of tests per product | Sampling and sample preparation (see in the supplement to this table, line T1 and line ...) | Test method to be applied | Sampling and sample preparation | | Test method to be applied | |
| | | See Table | | | | | | | | | |
| 3 | Hardness | | | | | T3 | T3 | T3 | Hardness tests | In accordance with EN ISO 6506-1. | |
| 3a | in the condition +S or +A | 7 | C +D +T | 1 | 1 | T3a | T3a | T3a | <p>In cases of dispute, the hardness shall, where possible, be determined at the following point on the surface:</p> <ul style="list-style-type: none"> — at a distance of 1x diameter from one end of the bar in the case of round bars; — at a distance of 1 x thickness from one end and 0,25 x thickness from one longitudinal edge of the product in the case of bars with square or rectangular cross-section and also in the case of flat products. <p>If it should be impossible to comply with the above, e.g. in the case of hammer or drop forgings, the most appropriate position for the hardness indentations shall be agreed at the time of ordering. Specimen preparation shall be in accordance with EN ISO 6506-1.</p> | | |
| 3b | Surface hardness | 9 | C | 1 | 1 | T3b | T3b | T3b | The test shall be carried out on a surface which is smooth and even, free from oxide scale and foreign matter. Preparation shall be carried out in such a way that any alteration of the surface hardness is minimized. This shall be taken into account particularly in the case of low-depth indentations (in accordance with EN ISO 6508-1:2005, clause 6). | In accordance with EN ISO 6508-1. | |

Table 10 – (continued)

| 1 | 2 | 3 | 4 | | 5 | 6 | 7 | (Supplement to Table 10, columns 6 and 7) | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|---|------------------------|-------------------------------------------------------|---------------------------------------------|-----|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| | | | Test unit ^a | Extent of testing Number of products per test unit | | | | Number of tests per product | Sampling and sample preparation (see in the supplement to this table, line T1 and line ...) | Test method to be applied |
| Sampling and sample preparation | Test method to be applied | | | | | | | | | |
| | See Table | | | | | | | | | |
| 4 | Mechanical properties of quenched and tempered products | 8 | C +D +T | 1 | 1 tensile and 3 Charpy-V-notch impact tests | T4a | T4 T4a | Tensile test and impact tests The test pieces for tensile test, and where applicable, the Charpy-V-notch impact tests shall be taken as follows: — for bars and rod in accordance with EN 10083-1:2006, Figure 1; — for flat products in accordance with EN 10083-1:2006, Figures 2 and 3; — in the case of hammer and drop forgings (see note 2 in EN 10083-1:2006, Clause 1), the test pieces shall be taken from a position agreed at the time of ordering in such a way that their longitudinal axis lies in the direction of principal grain flow. The tensile test pieces shall be prepared in accordance with EN 10002-1, the impact test pieces in accordance with EN 10045-1. | In cases of dispute the tensile test shall be carried out on proportional test pieces having a gauge length of $L_0 = 5,65 \sqrt{S_0}$ (where S_0 is the original cross-sectional area). Where this is not possible – i.e. for flat products with thickness of < 3 mm – a test piece with constant gauge length as specified in EN 10002-1 shall be agreed at the time of enquiry and order. In this case the minimum elongation value to be obtained for these test pieces shall also be agreed. The impact test shall be carried out on Charpy V-notch test pieces in accordance with EN 10045-1. | |
| NOTE Verification of the requirements is only necessary if an inspection certificate is ordered and if the requirement is applicable according to Table 1, column 8 or 9. | | | | | | | | | | |
| a The tests shall be carried out separately for each cast indicated by "C" – for each dimension as indicated by "D" – and for each heat treatment batch as indicated by "T". Products of different thicknesses may be grouped if the thicknesses lie in the same dimension range for mechanical properties and if the differences do not affect the properties. | | | | | | | | | | |
| b If the product is continuously heat treated, one test piece shall be taken for each 25 t or part thereof, but at least one test piece shall be taken per cast. | | | | | | | | | | |

Table 11 — Heat treatment ^a

| Steel designation ^b | | Quenching ^{c,d} | Quenching ^e | Tempering ^f | End quench test |
|--------------------------------|--------|--------------------------|------------------------|------------------------|-----------------|
| Name | Number | °C | agent | °C | °C |
| 38Cr2 | 1.7003 | 830 to 870 | Oil or water | 540 to 680 | 850 ± 5 |
| 46Cr2 | 1.7006 | 820 to 860 | Oil or water | 540 to 680 | 850 ± 5 |
| 34Cr4 | 1.7033 | 830 to 870 | Water or oil | 540 to 680 | 850 ± 5 |
| 34CrS4 | 1.7037 | | | | |
| 37Cr4 | 1.7034 | 825 to 865 | Oil or water | 540 to 680 | 850 ± 5 |
| 37CrS4 | 1.7038 | | | | |
| 41Cr4 | 1.7035 | 820 to 860 | Oil or water | 540 to 680 | 850 ± 5 |
| 41CrS4 | 1.7039 | | | | |
| 25CrMo4 | 1.7218 | 840 to 900 | Water or oil | 540 to 680 | 850 ± 5 |
| 25CrMoS4 | 1.7213 | | | | |
| 34CrMo4 | 1.7220 | 830 to 890 | Oil or water | 540 to 680 | 850 ± 5 |
| 34CrMoS4 | 1.7226 | | | | |
| 42CrMo4 | 1.7225 | 820 to 880 | Oil or water | 540 to 680 | 850 ± 5 |
| 42CrMoS4 | 1.7227 | | | | |
| 50CrMo4 | 1.7228 | 820 to 870 | Oil | 540 to 680 | 850 ± 5 |
| 34CrNiMo6 | 1.6582 | 830 to 860 | Oil or water | 540 to 660 | 850 ± 5 |
| 30CrNiMo8 | 1.6580 | 830 to 860 | Oil or water | 540 to 660 | 850 ± 5 |
| 35NiCr6 | 1.5815 | 840 to 860 | Oil or water | 530 to 630 | 850 ± 5 |
| 36NiCrMo16 | 1.6773 | 865 to 885 | Air, oil or water | 550 to 650 | 850 ± 5 |
| 39NiCrMo3 | 1.6510 | 830 to 850 | Oil or water | 550 to 650 | 850 ± 5 |
| 30NiCrMo16-6 | 1.6747 | 840 to 860 | Oil | 540 to 630 | 850 ± 5 |
| 51CrV4 | 1.8159 | 820 to 870 | Oil | 540 to 680 | 850 ± 5 |
| 20MnB5 | 1.5530 | 880 to 920 | Water | 400 to 600 | 900 ± 5 |
| 30MnB5 | 1.5531 | 860 to 900 | Water | 400 to 600 | 880 ± 5 |
| 38MnB5 | 1.5532 | 840 to 880 | Water or oil | 400 to 600 | 850 ± 5 |
| 27MnCrB5-2 | 1.7182 | 880 to 920 | Water or oil | 400 to 600 | 900 ± 5 |
| 33MnCrB5-2 | 1.7185 | 860 to 900 | Oil | 400 to 600 | 880 ± 5 |
| 39MnCrB6-2 | 1.7189 | 840 to 880 | Oil | 400 to 600 | 850 ± 5 |

^a The conditions given in this table are for guidance. However, the temperatures specified for the end quench test are mandatory.


^b This table also applies for the various grades with specified hardenability (+H-, +HH- and +HL grades) covered in Tables 5 and 6.

^c The temperatures at the lower end of the range are generally applicable to hardening in water and those at the upper end for hardening in oil.

^d Austenitizing period: at least 30 min (guide value).

^e When choosing the quenching agent the influence of other parameters, such as shape, dimensions and quenching temperature on properties and crack susceptibility should be taken into account. Other quenching agents such as synthetic quenchants may also be used.


^f Tempering period: at least 60 min (guide value).

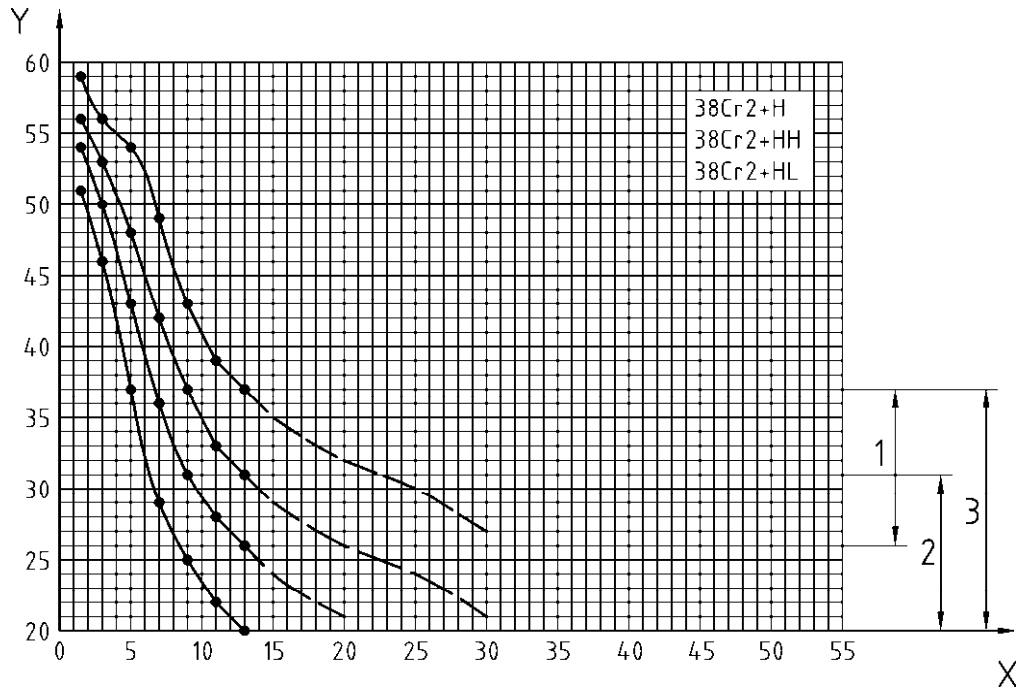

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1a — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

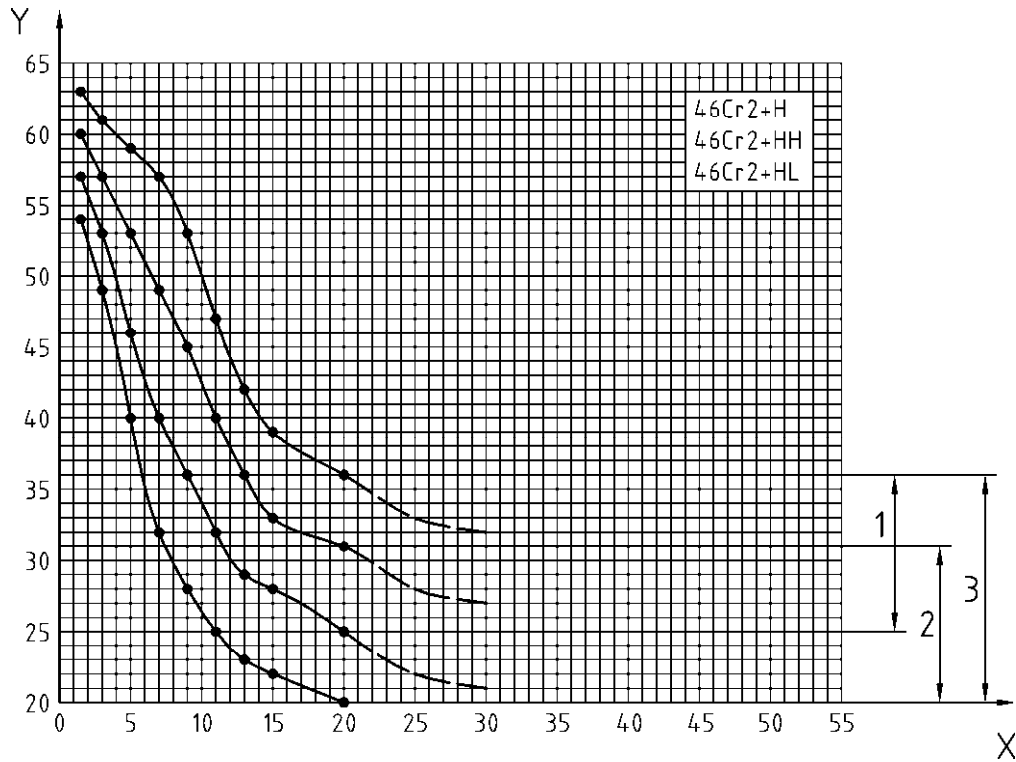

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1b — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

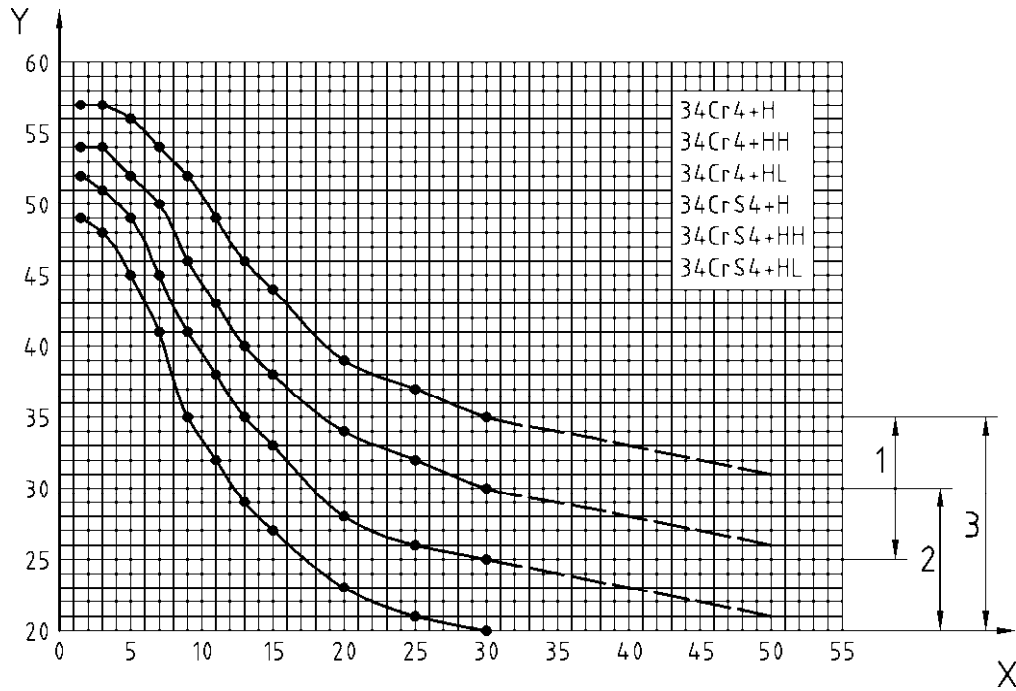

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1c — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

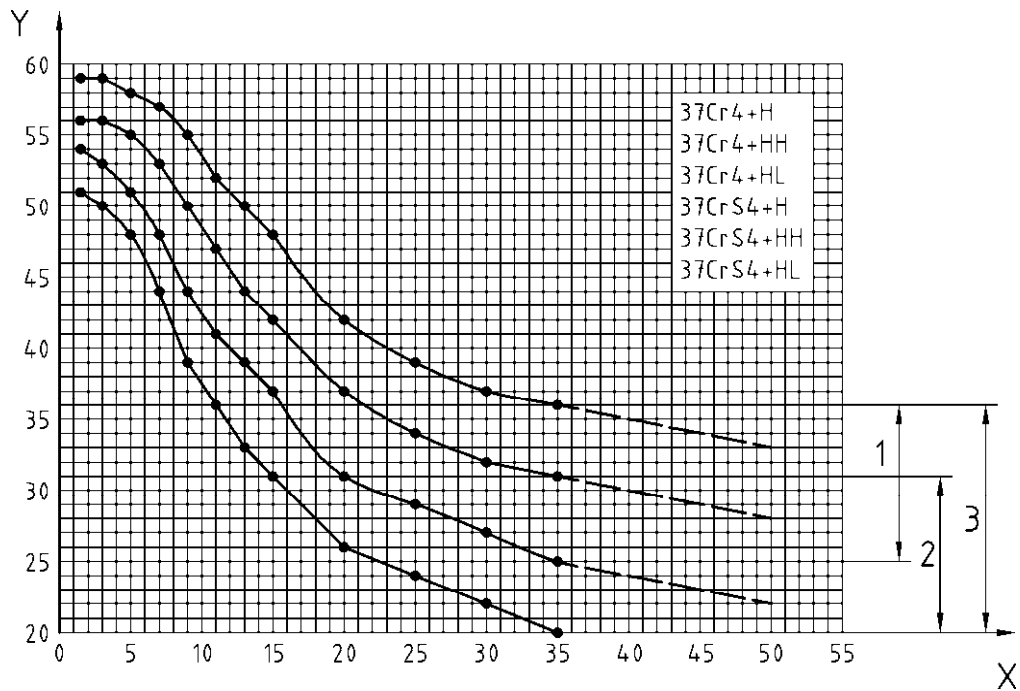

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1d — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

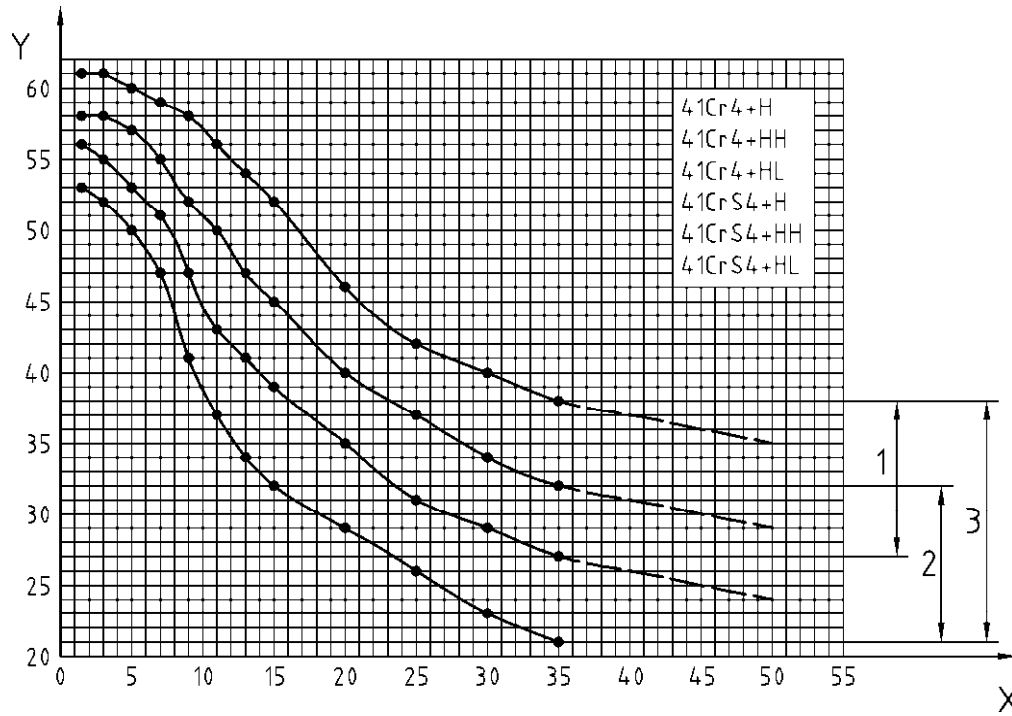

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1e — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

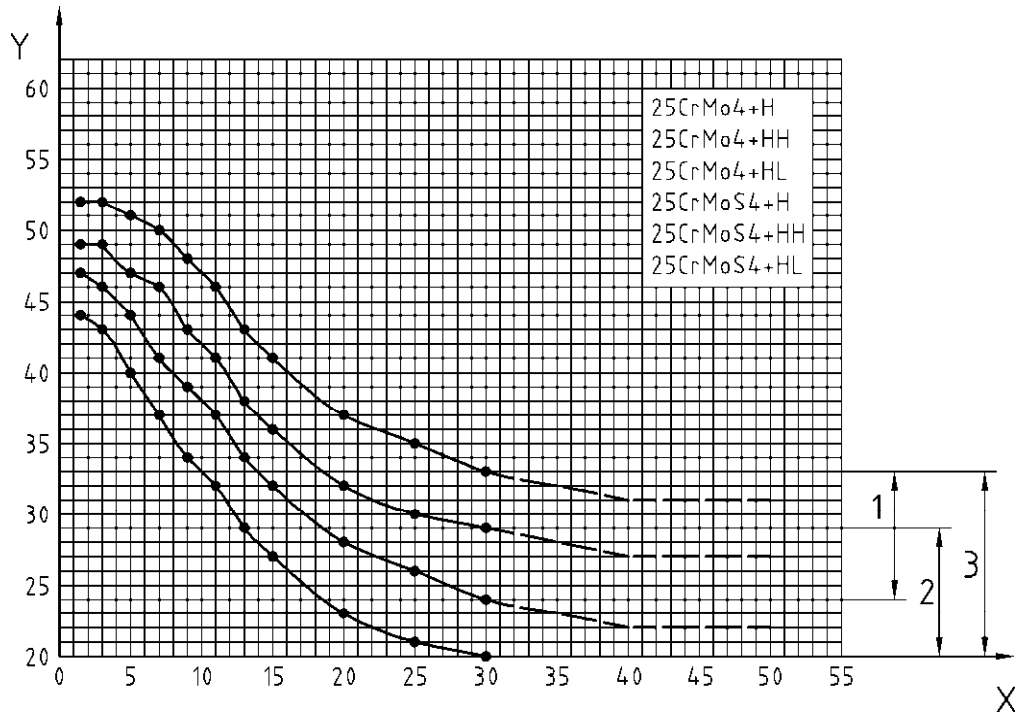

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1f — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

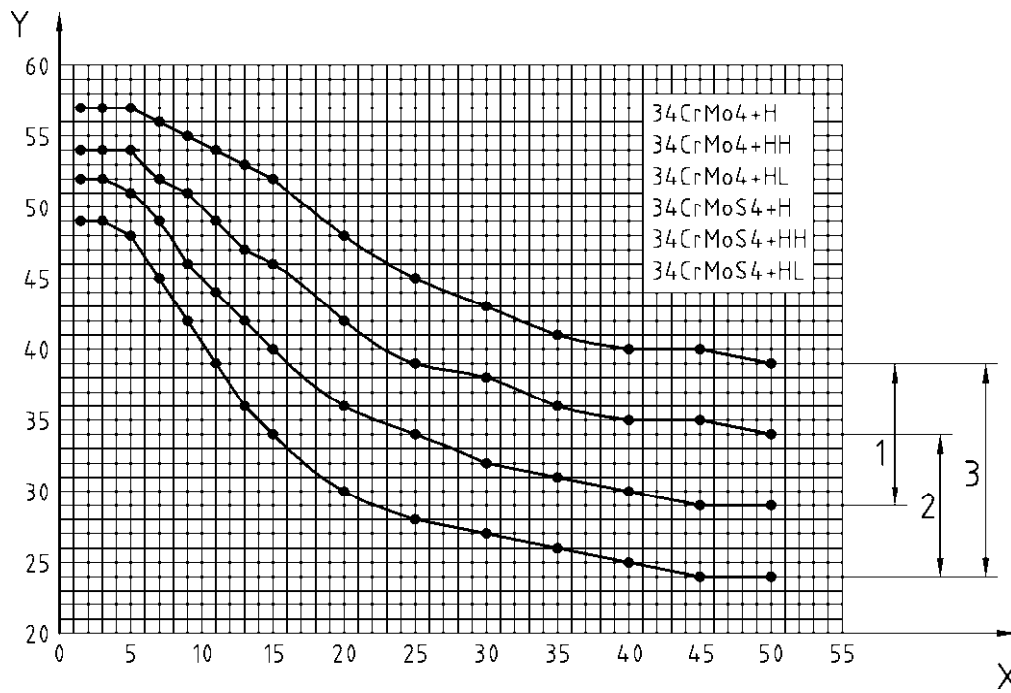

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1g — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

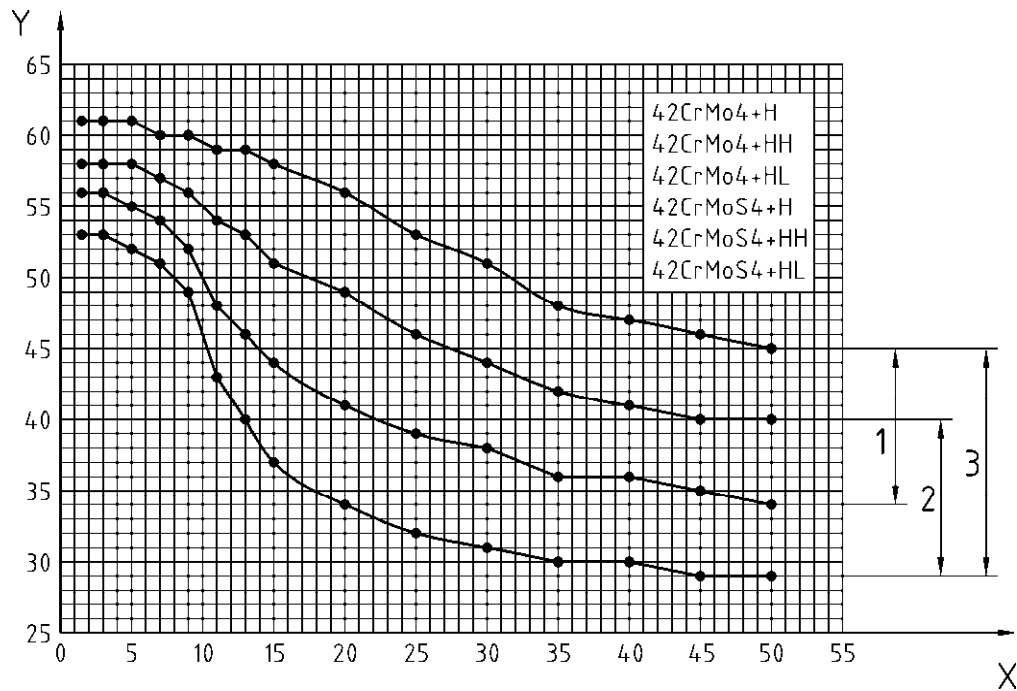

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1h — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

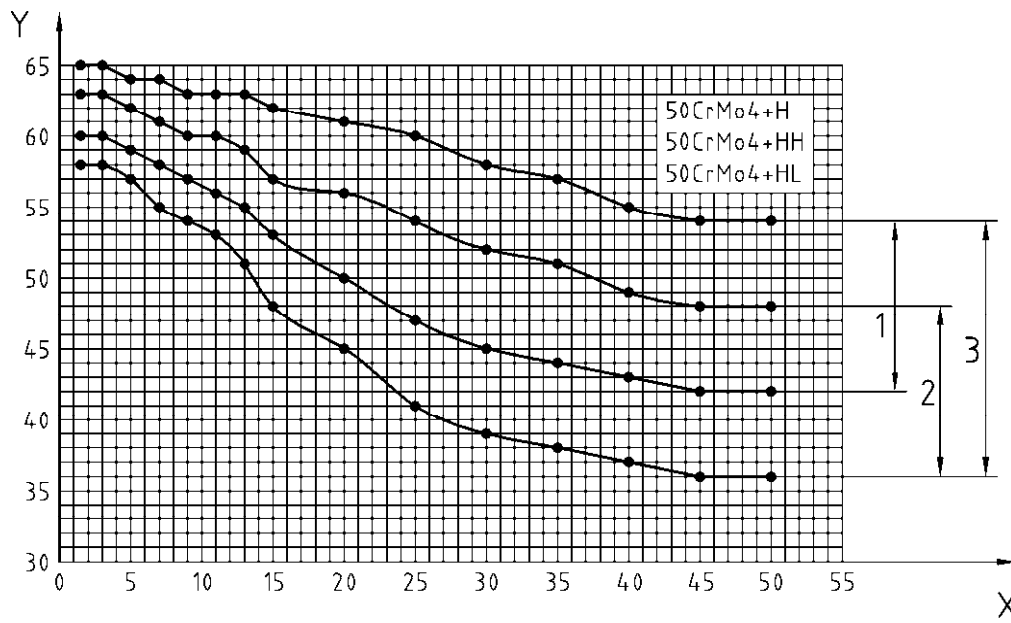

Key


- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade

Figure 1i — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

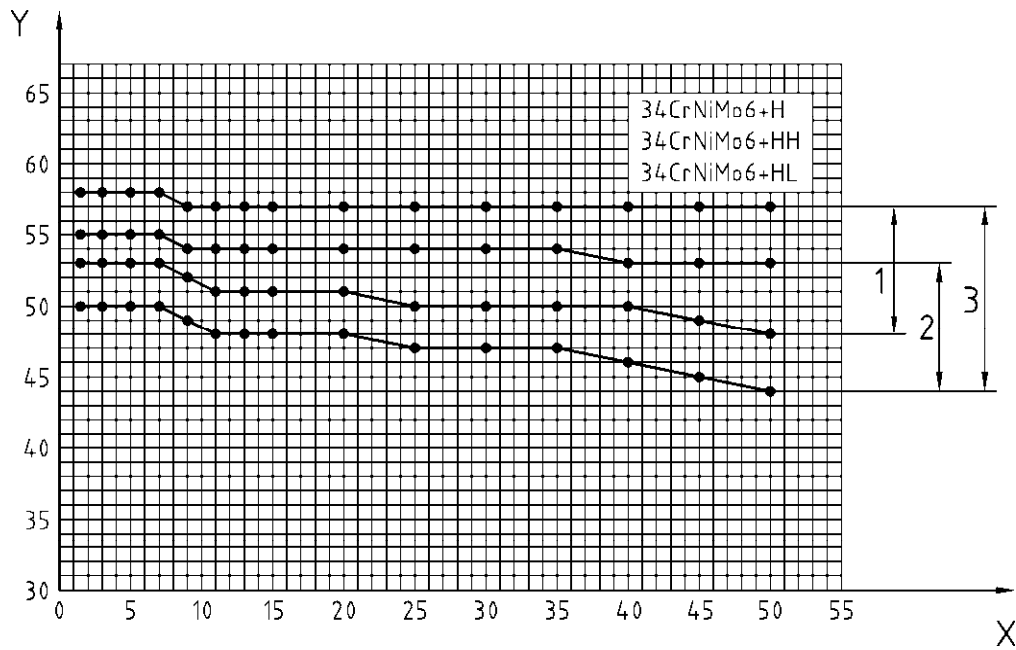**Key**

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1j — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

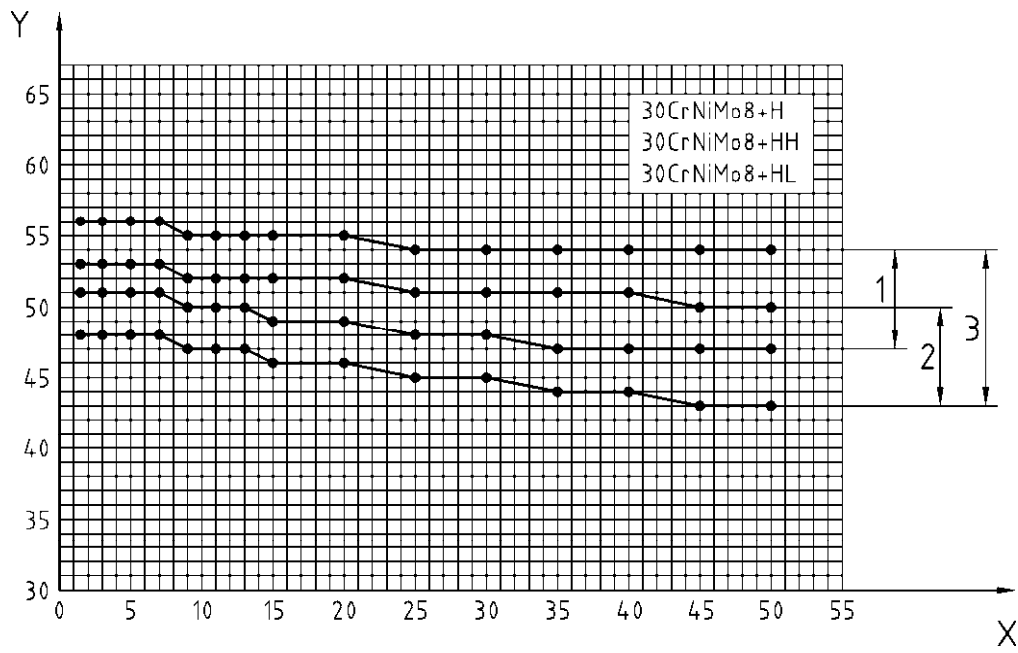

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1k — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

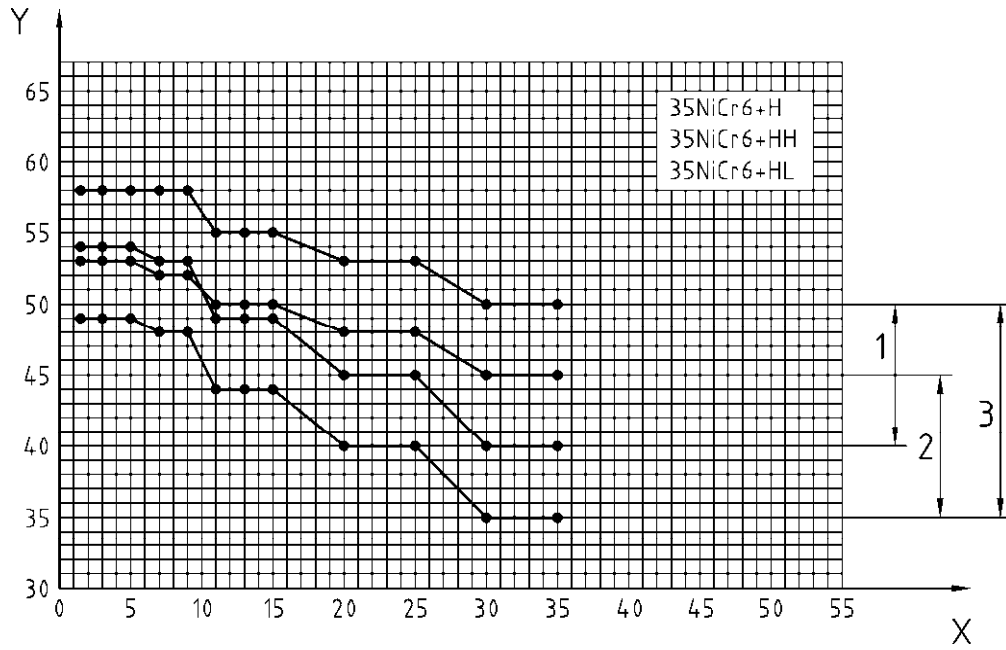

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1I — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

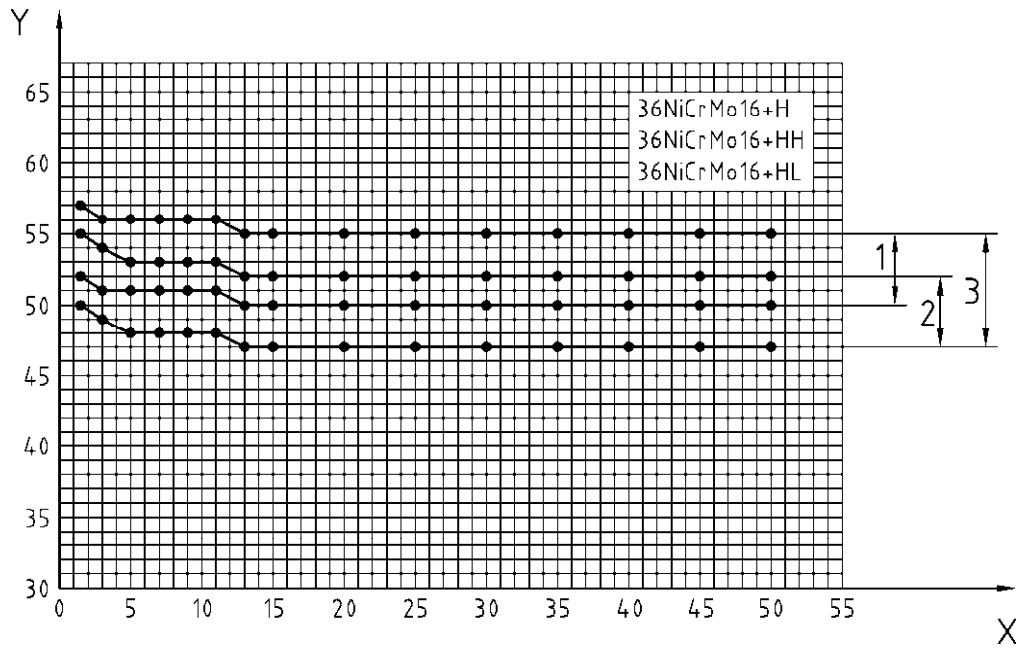

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1m — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

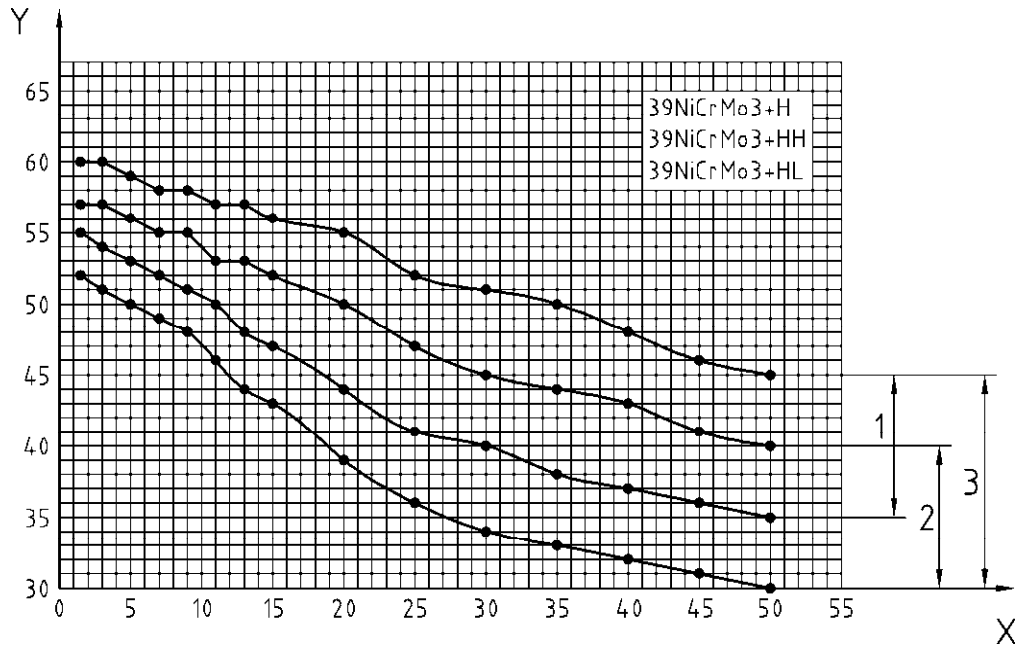

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1n — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

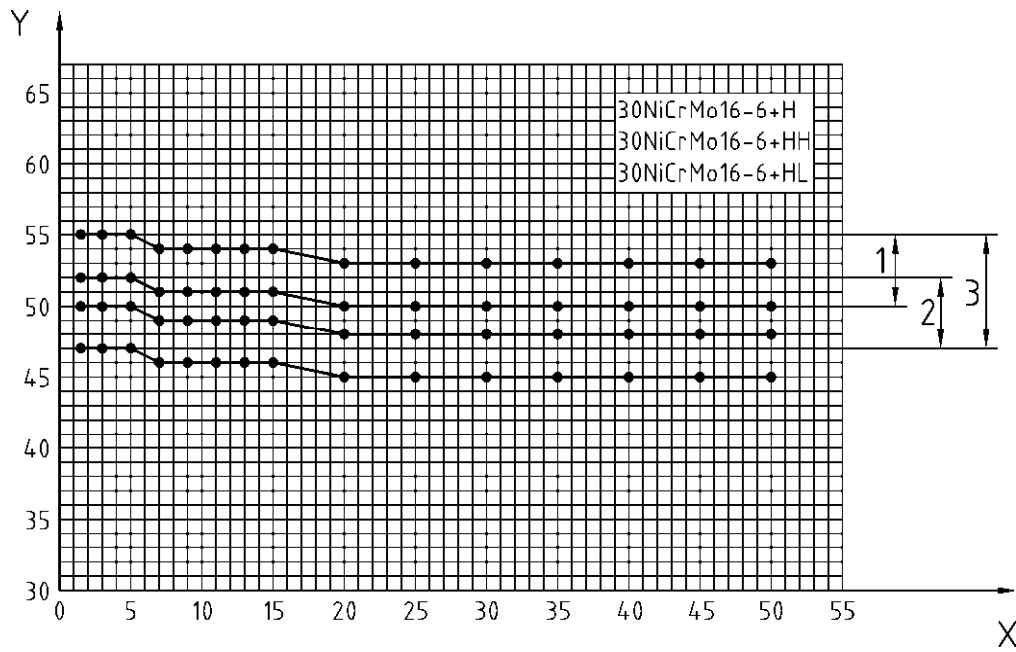

Key


- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade

Figure 1o — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

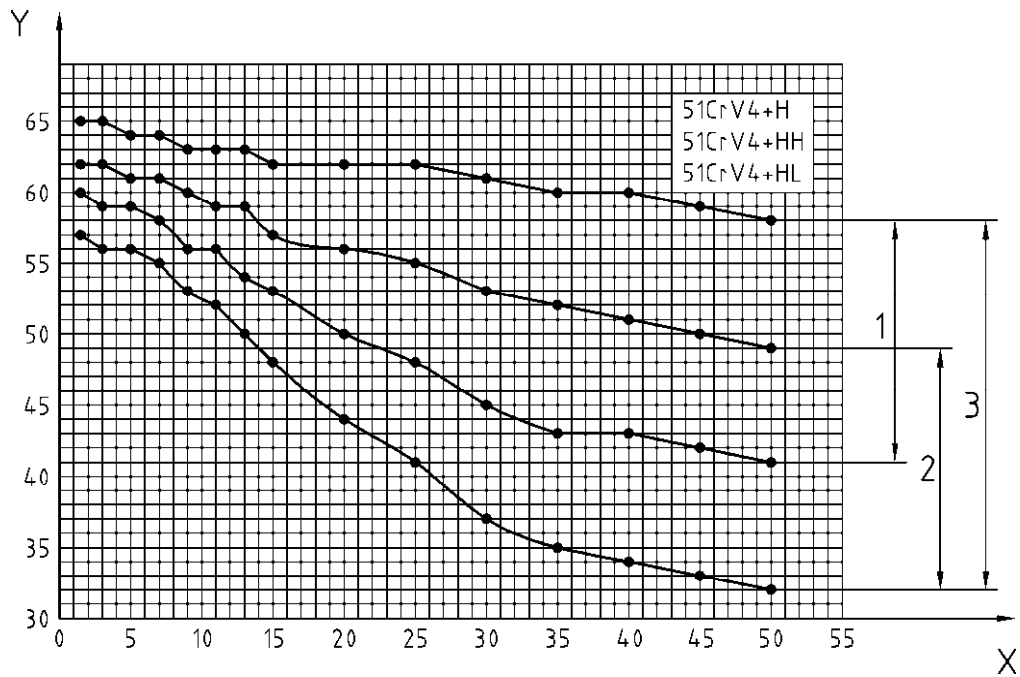**Key**

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1p — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

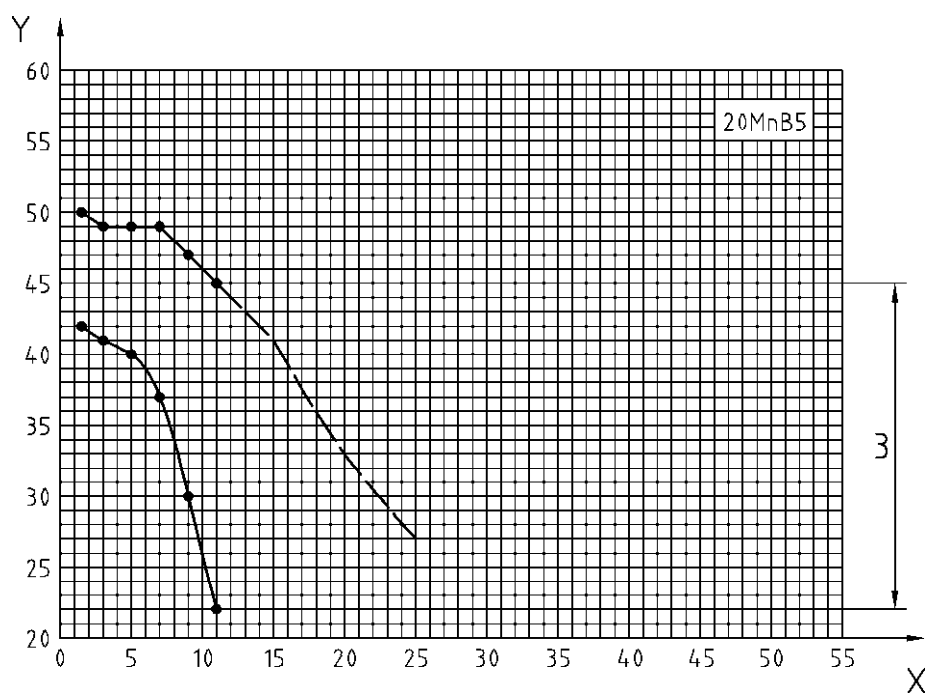

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1q — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

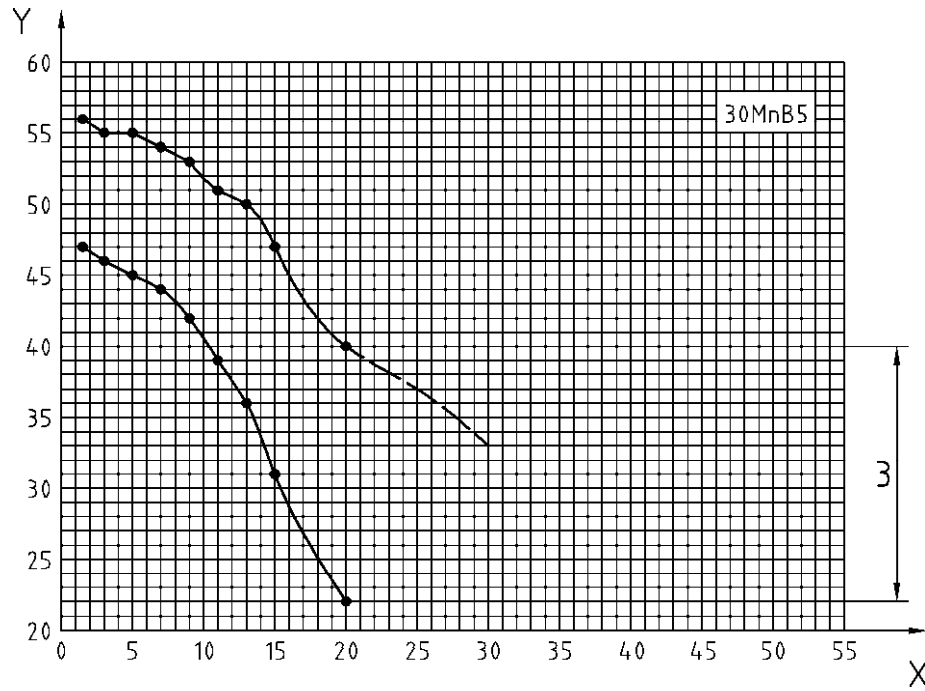

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade


Figure 1r — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

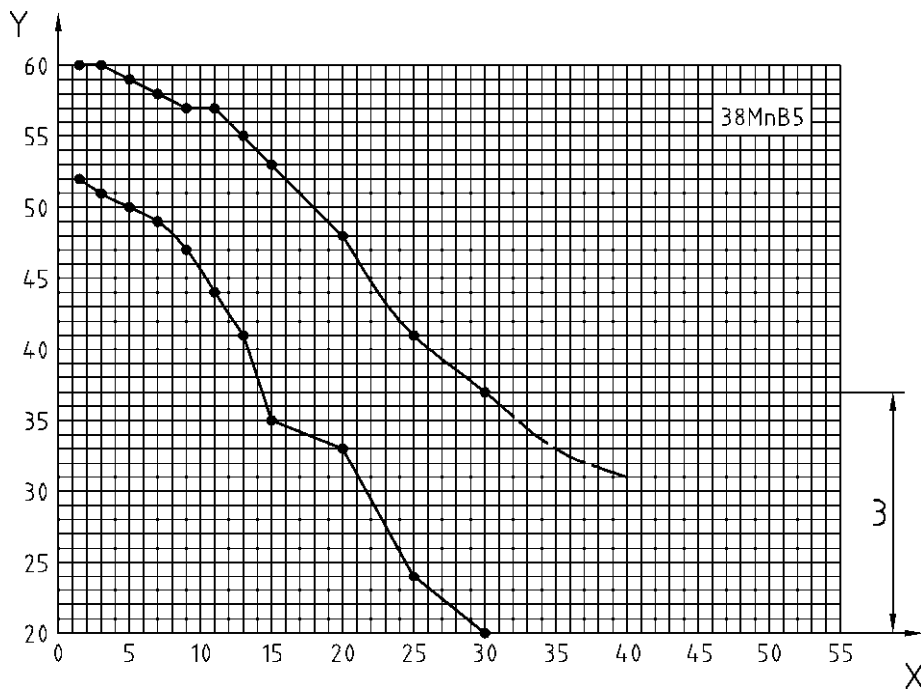

Key


- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade

Figure 1s — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

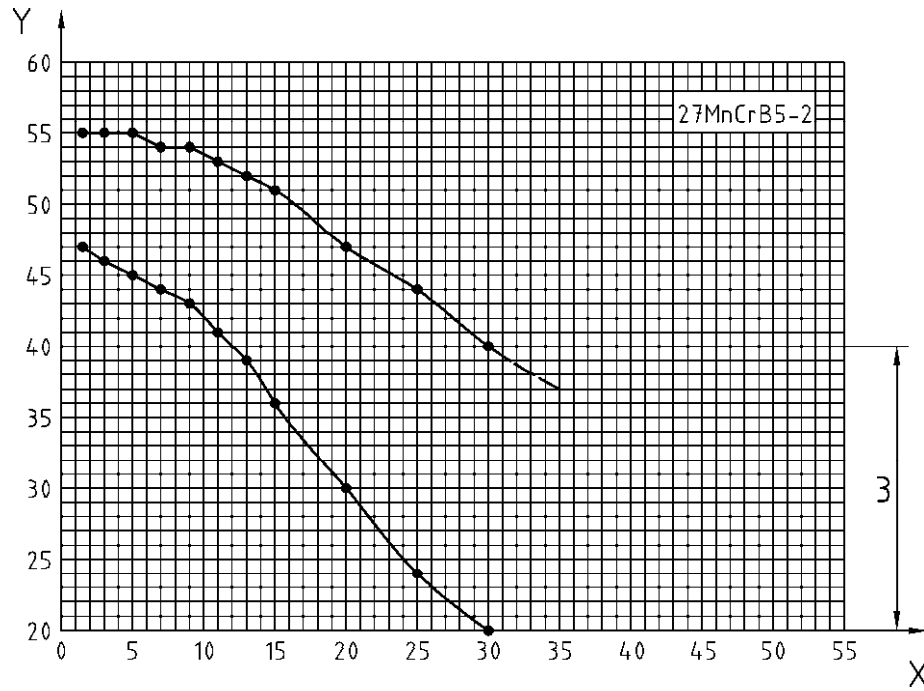**Key**

- X Distance from quenched end of test piece, mm
 Y Hardness, HRC
 1 HH-grade
 2 HL-grade
 3 H-grade


Figure 1t — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

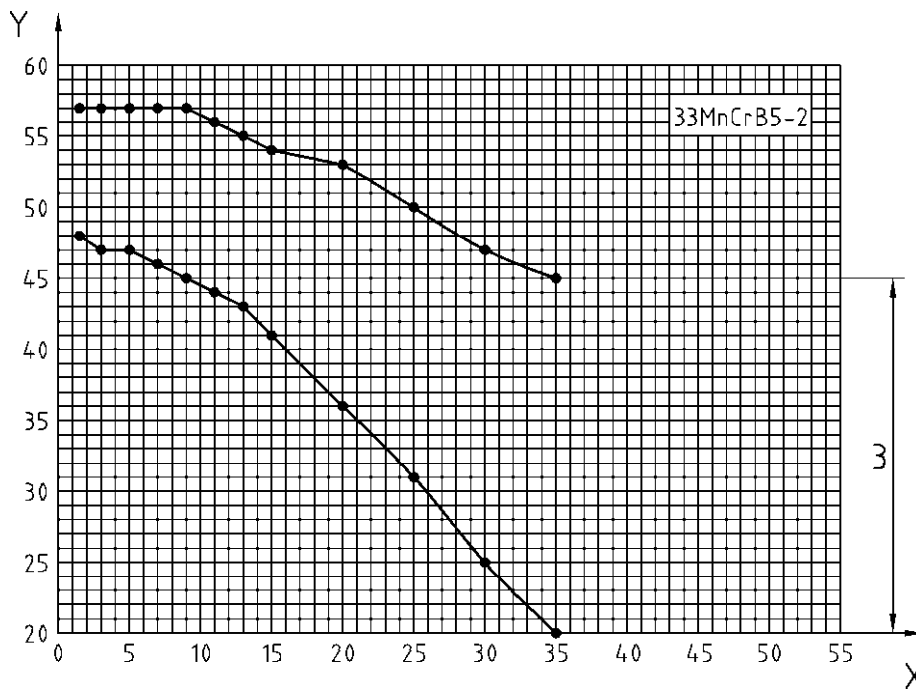

Key

- X Distance from quenched end of test piece, mm
- Y Hardness, HRC
- 1 HH-grade
- 2 HL-grade
- 3 H-grade

Figure 1u — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

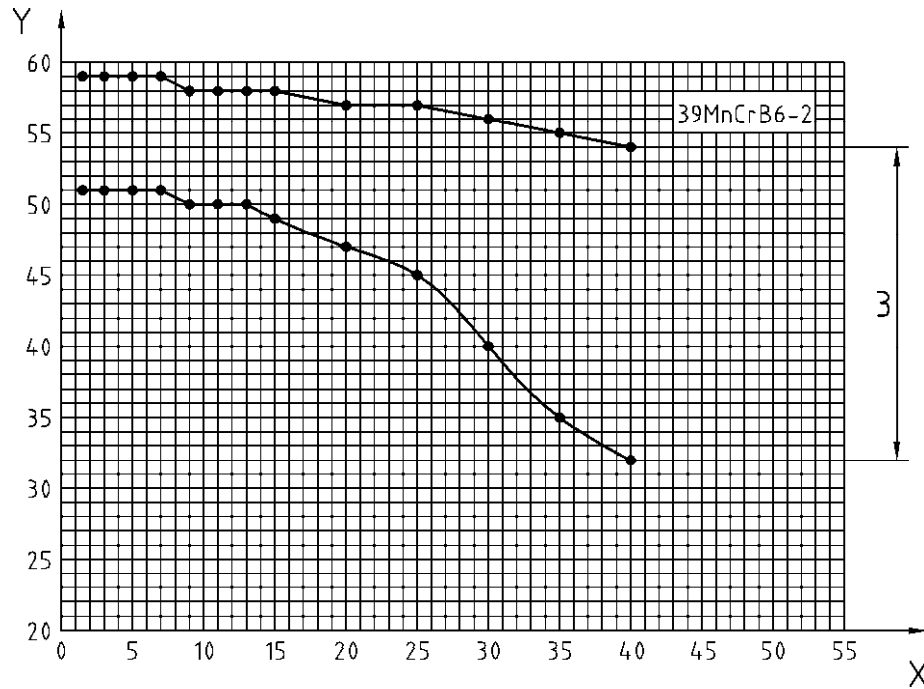**Key**

- X Distance from quenched end of test piece, mm
 Y Hardness, HRC
 1 HH-grade
 2 HL-grade
 3 H-grade

Figure 1v — Scatter bands for the Rockwell - C hardness in the end quench hardenability test

Annex A (normative)

Options

NOTE 1 One or more of the following supplementary or special requirements may be agreed upon at the time of enquiry and order. The details of these requirements may be agreed upon between the manufacturer and purchaser at the time of enquiry and order if necessary.

NOTE 2 The numbering of clauses is the same as in EN 10083-1:2006, annex B.

A.1 Mechanical properties of reference test pieces in the quenched and tempered condition

For deliveries in a condition other than quenched and tempered, the requirements for the mechanical properties in the quenched and tempered condition shall be verified on a reference test piece.

In the case of bars and rods, the sample to be quenched and tempered shall, unless otherwise agreed, have the cross-section of the product. In all other cases the dimensions and the manufacture of the sample shall be agreed at the time of enquiry and order, where appropriate, while taking into consideration the indications for the determination of the ruling section given in EN 10083-1:2006, Annex A. The samples shall be quenched and tempered in accordance with the conditions given in Table 11 or as agreed at the time of enquiry and order. The details of the heat treatment shall be given in the inspection document. The test pieces shall, unless otherwise agreed, be taken in accordance with EN 10083-1:2006, Figure 1 for bars and rods and in accordance with EN 10083-1:2006, Figure 3 for flat products.

A.2 Fine grain steel

This supplementary requirement concerns only the verification of the fine grain size.

When tested in accordance with EN ISO 643, the steel shall have an austenite grain size of 5 or finer. If specific testing is ordered, it shall also be agreed whether this grain size requirement is to be verified by determining the aluminium content or micrographically. In the first case, the aluminium content shall also be agreed.

In the second case, one test piece shall be inspected per cast for the determination of the austenitic grain size. Sampling and sample preparation shall be as specified in EN ISO 643.

Unless otherwise agreed at the time of enquiry and order, the quenched grain size shall be determined. Hardening shall be carried out under the following conditions for the purposes of determining the quenched grain size:

- for steels with a lower carbon content limit $< 0,35\%$: $(880 \pm 10)^\circ\text{C}$, 90 min/water;
- for steels with a lower carbon content limit $\geq 0,35\%$: $(850 \pm 10)^\circ\text{C}$, 90 min/water.

In cases of dispute, pretreatment at $1\ 150^\circ\text{C}$ for 30 min/air shall be carried out in order to produce a uniform starting condition.

A.3 Non-metallic inclusion content

The microscopically determined non-metallic inclusion content shall be within agreed limits when tested according to a procedure to be agreed at the time of enquiry and order (see EN 10083-1:2006, Annex E).

NOTE 1 The requirements for non metallic inclusion content apply in every case, however, verification requires a special agreement.

NOTE 2 For steels with a specified minimum sulphur content the agreements should only concern the oxides.

A.4 Non-destructive testing

Steel flat products of thickness equal to or greater than 6 mm shall be tested ultrasonically in accordance with EN 10160 and steel bars shall be tested ultrasonically in accordance with EN 10308. Other products shall be non-destructively tested in accordance with a method to be agreed at the time of enquiry and order and to acceptance criteria also to be agreed at the time of enquiry and order.

A.5 Product analysis

One product analysis shall be carried out per cast for elements for which values are specified for the cast analysis of the steel type concerned.

The conditions for sampling shall be in accordance with EN ISO 14284. In the case of dispute about the analytical method, the chemical composition shall be determined in accordance with a reference method taken from one of the European Standards in CR 10261.

A.6 Special agreements for marking

The products shall be specially marked (e.g. by bar coding in accordance with EN 606) in a way agreed upon at the time of enquiry and order.

Annex B (informative)

Comparison of steel grades specified in this European Standard and ISO 683-1:1987 and other steel grades previously standardized nationally

Table B.1 — Comparison of steel grades

| EN 10083-3 | | ISO 683-1:1987 ^a | Germany ^a | | United Kingdom ^a | France ^a | Italy ^a | Sweden SS- steel | Spain ^a | |
|---------------------|------------------|-----------------------------|----------------------|------------------|-----------------------------|--------------------------|------------------------|------------------|---------------------|-------------------|
| Name | Number | | Name | Number | | | | | Name | Number |
| 38Cr2 | 1.7003 | - | 38Cr2 | 1.7003 | - | (38 C 2) | - | - | - | - |
| 46Cr2 | 1.7006 | - | 46Cr2 | 1.7006 | - | - | - | - | - | - |
| 34Cr4 34CrS4 | 1.7033 1.7037 | 34Cr4 34CrS4 | 34Cr4 34CrS4 | 1.7033 1.7037 | (530M32) - | (32 C 4) (32 C 4 u) | - | - - | - - | - - |
| 37Cr4 37CrS4 | 1.7034 1.7038 | 37Cr4 37CrS4 | 37Cr4 37CrS4 | 1.7034 1.7038 | (530M36) - | (38 C 4) (38 C 4 u) | - | - - | 38Cr4 38Cr41 | F1201 F1206(1) |
| 41Cr4 41CrS4 | 1.7035 1.7039 | 41Cr4 41CrS4 | 41Cr4 41CrS4 | 1.7035 1.7039 | (530M40) - | 42 C 4 42 C 4 u | (41Cr4) (41Cr4) | - 2245 | 42Cr4 42Cr41 | F1202 F1207(1) |
| 25CrMo4 25CrMoS4 | 1.7218 1.7213 | 25CrMo4 25CrMoS4 | 25CrMo4 25CrMoS4 | 1.7218 1.7213 | (708M25) - | 25 CD 4 25 CD 4 u | (25CrMo4) (25CrMo4) | 2225 - | - - | - - |
| 34CrMo4 34CrMoS4 | 1.7220 1.7226 | 34CrMo4 34CrMoS4 | 34CrMo4 34CrMoS4 | 1.7220 1.7226 | (708M32) - | (34 CD 4) (34 CD 4 u) | (35CrMo4) (35CrMo4) | 2234 - | - - | - - |
| 42CrMo4 42CrMoS4 | 1.7225 1.7227 | 42CrMo4 42CrMoS4 | 42CrMo4 42CrMoS4 | 1.7225 1.7227 | (708M40) - | 42 CD 4 42 CD 4 u | (42CrMo4) (42CrMo4) | 2244 - | 40CrMo4 40CrMo41 | F1252 F1257(1) |
| 50CrMo4 | 1.7228 | 50CrMo4 | 50CrMo4 | 1.7228 | (708M50) | - | - | - | - | - |
| 34CrNiMo6 | 1.6582 | (36CrNiMo6) | (34CrNiMo6) | 1.6582 | (817M40) | - | - | 2541 | - | - |
| 30CrNiMo8 | 1.6580 | (31CrNiMo8) | 30CrNiMo8 | 1.6580 | [823M30] | 30 CND 8 | - | - | - | - |
| 35NiCr6 | 1.5815 | - | 35NiCr6 | - | - | - | - | - | - | - |
| 36NiCrMo16 | 1.6773 | - | - | - | - | 35 NCD 16 | - | - | - | - |
| 39NiCrMo3 | 1.6510 | - | - | - | - | - | (39NiCrMo3) | - | - | - |
| 30NiCrMo16-6 | 1.6747 | - | 30NiCrMo16-6 | 1.6747 | [835M30] | - | - | - | - | - |
| 51CrV4 | 1.8159 | (51CrV4) | 50CrV4 | 1.8159 | [735A50] | (50CV 4) | (50CrV4) | - | 51CrV4 | F1430 |

^a If a steel grade is given in round brackets, this means that the chemical composition differs only slightly from EN 10083-3. If it is given in square brackets, this means that greater differences exist in the chemical composition compared with EN 10083-3. If there are no brackets around the steel grade, this means that there are practically no differences in the chemical composition compared with EN 10083-3.

Annex C (informative)

Reference values for the maximum diameter at a certain core hardness of steels with boron

Table C.1 contains reference data for the maximum diameter at certain core hardness after hardening in oil or water.

**Table C.1 — Reference values for the maximum diameter at a certain core hardness
of steels with boron**

| Steel name | Hardening temperature °C | Core hardness ^a HRC | Approximate maximum diameter mm | |
|------------|-----------------------------|-----------------------------------|------------------------------------|-----|
| | | | Water | Oil |
| 20MnB5 | 900 | 34 | 32 | 25 |
| 30MnB5 | 880 | 40 | 38 | 30 |
| 38MnB5 | 850 | 45 | 40 | 32 |
| 27MnCrB5-2 | 900 | 38 | 52 | 43 |
| 33MnCrB5-2 | 880 | 42 | 55 | 45 |
| 39MnCrB6-2 | 850 | 45 | 95 | 80 |

^a For 80 % martensite.

Bibliography

- [1] EN 10021, *General technical delivery requirements for steel and iron products*